
This is an electronic reprint of the original article.
This reprint may differ from the original in pagination and typographic detail.

Rueda Marquez, Juan José; Levchuk, Irina; Fernández Ibanez, Pilar; Sillanpää, Mika
A critical review on application of photocatalysis for toxicity reduction of real wastewaters

Published in:
Journal of Cleaner Production


DOI:
[10.1016/j.jclepro.2020.120694](https://doi.org/10.1016/j.jclepro.2020.120694)

Published: 10/06/2020

Document Version
Publisher's PDF, also known as Version of record

Published under the following license:
CC BY-NC-ND

Please cite the original version:
Rueda Marquez, J. J., Levchuk, I., Fernández Ibanez, P., & Sillanpää, M. (2020). A critical review on application of photocatalysis for toxicity reduction of real wastewaters. *Journal of Cleaner Production*, 258, Article 120694.
<https://doi.org/10.1016/j.jclepro.2020.120694>



Review

A critical review on application of photocatalysis for toxicity reduction of real wastewaters

Juan José Rueda-Marquez ^{a,*}, Irina Levchuk ^b, Pilar Fernández Ibañez ^c, Mika Sillanpää ^a^a Laboratory of Green Chemistry, Lappeenranta University of Technology, Sammonkatu 12 (Innovation Centre for Safety and Material Technology, TUMA), 50130, Mikkeli, Finland^b Water and Wastewater Engineering Research Group, School of Engineering, Aalto University, PO Box 15200, FI-00076, Aalto, Finland^c Nanotechnology and Integrated BioEngineering Centre, School of Engineering, Ulster University, Northern Ireland, BT37 0QB, United Kingdom

ARTICLE INFO

Article history:

Received 6 November 2019

Received in revised form

18 February 2020

Accepted 19 February 2020

Available online 22 February 2020

Handling editor: Prof. Jiri Jaromir Klemeš

Keywords:

Real wastewater

Photocatalysis

Advanced oxidation processes (AOP)

Toxicity

Bioassays

ABSTRACT

Advanced oxidation processes (AOPs) such as photocatalysis are widely studied for degradation of organic pollutants of contaminants of emerging concern (CECs). However, degradation of organic pollutants leads to formation of by-products, which may be more toxic than parental contaminants. The toxicity of wastewater treated by photocatalysis is topical issue. In this review paper recent studies concerned with photocatalytic detoxification of real industrial and municipal wastewater were assembled and critically discussed. Such issues as challenges for application of photocatalytic wastewater detoxification, feasibility of various toxicity tests, reuse of photocatalysts, cost estimation, etc. were considered. Based on reviewed literature it can be suggested that photocatalysis might not always be a promising treatment method for degradation of organic pollutants in real wastewaters and/or wastewater detoxification from the application point of view.

© 2020 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Contents

1. Introduction	1
2. Method	2
3. Photocatalysis	6
3.1. Technical challenges and toxicity	6
3.1.1. Photocatalytic materials and their possible contribution to toxicity	7
3.1.2. Radiation sources and type of wastewater	8
3.1.3. Toxicity	9
4. Conclusions	10
Declaration of competing interest	11
Acknowledgments	11
References	11

1. Introduction

Pharmaceuticals, personal care products, endocrine disrupting

compounds, pesticides, polycyclic aromatic hydrocarbons (PAHs), polychlorinated biphenyl (PCBs and other contaminants of emerging concern are present in trace concentrations in industrial and municipal wastewater effluents (Lara-Martín et al., 2014; Pintado-Herrera et al., 2014). Wastewater treatment plants do not provide complete elimination of contaminants of emerging concern, which leads to its discharge to receiving environment

* Corresponding author.

E-mail address: juan.rueda.marquez@lut.fi (J.J. Rueda-Marquez).

(Gracia-Lor et al., 2012). Even trace concentrations of these contaminants in aquatic bodies negatively affect aquatic organisms (François et al., 2015; Quinn et al., 2009, 2011).

Advanced Oxidation Processes (AOPs) are known as promising methods for removal of contaminants of emerging concern from wastewater effluents. Among AOPs, photocatalysis is widely studied for wastewater treatment. Thus, during the last ten years, more than 16,000 scientific articles containing "photocatalysis" or "photocatalyst" were published (Scopus) and each year the number of publications is increasing. These data are not surprising because the photocatalytic properties of semiconductors are studied for wastewater treatment, surfaces with self-cleaning and antifogging properties (Li and He, 2013), purification of outdoor air, indoor air deodorization, cancer therapy, etc. (Rao et al., 2003). Number of scientific publications devoted to photocatalytic wastewater purification and detoxification is shown in Fig. 1. It is well known that during photocatalytic decomposition of target pollutants in water, generation of more toxic by-products can occur. Thus, it is of high importance to evaluate toxicity of treated wastewater effluent. Among these, there are also a number of studies investigating the photocatalytic degradation of model pollutants and the toxicity of their TPs (transformation products). Nevertheless, these studies do not represent the real scenario of industrial or urban wastewaters as they use higher pollutants' concentrations than found in real cases. In this review, only those studies on detoxification of real wastewater (urban or industrial) are considered. By contrast, all studies focused on reduction of toxicity by photocatalysis in model solutions were excluded from this review. The aim of this work is to systemize and analyse research results on detoxification of real industrial and municipal wastewater (IWW and MWW) by photocatalysis, with implications in the toxicity effects (see Table 1).

2. Method

The methods applied in this literature review included identification of the relevant studies and preparing set of questions to be addressed to selected literature relevant to the scope of this review. Identification of relevant literature was performed by searching in Science Direct, Scopus and Google Scholar and NCBI databases

using following keywords: "photocatalysis", "toxicity", "bioassays", "wastewater". After that the generated literature list was checked manually (reading materials and methods and results) in order to exclude studies, in which (i) real or synthetic wastewater was not used; (ii) toxicity assessment of wastewater before and after photocatalytic treatment was not conducted. Moreover, literature reviews were not considered. It should be noticed that only relevant articles published during the period 2009–2019 were included to this review. Moreover, relevant studies found during screening other studies were included to the list during literature identifying step. The literature search was limited to articles published in peer-reviewed journals in English language. Reports published in other languages as well as books were excluded from the literature search.

Prepared list of scientific articles was critically analysed through extracting relevant information using the list of questions shown below:

- Which type of photocatalytic nanoparticles was used?
- Was the release of ions from photocatalyst studied?
- Was the issue of separation of photocatalytic nanoparticles (in case these were used) from treated wastewater addressed?
- Which type of photocatalytic thin films was used?
- Was the detachment of nanoparticles from thin films studied?
- Which type of wastewater was used?
- Which irradiation source was applied for photocatalytic wastewater treatment?
- Was the pre-treatment of wastewater, for instance pH modification, performed prior photocatalytic treatment?
- Which type of toxicity tests were applied?
- Was the toxicity assessment conducted during photocatalytic treatment of wastewater?
- What was the scale of performed experiments?
- Was the intensity of irradiation source available?
- Was the treatment time realistic, applicable in real world cases?
- Was the sensitivity of toxicity tests compared?
- Was the issue of photocatalyst reuse addressed?

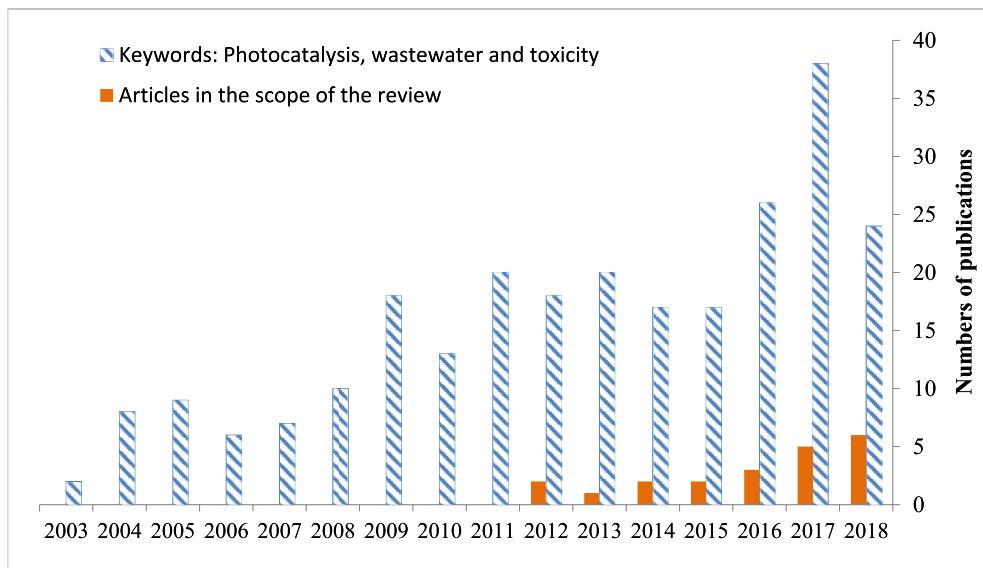


Fig. 1. Number of scientific publications per year containing keywords (Scopus): "Photocatalysis", "wastewater" and "toxicity" in the title and/or keywords of article (blue). Number of articles in which real wastewater matrix was used (orange). (For interpretation of the references to color in this figure legend, the reader is referred to the Web version of this article.)

Table 1

Toxicity bioassays applied for assessment of wastewater detoxification after photocatalysis, photocatalytic ozonation and photocatalysis-based AOPs.

AOP Process and Reference	Experimental conditions	Type of the water	Toxicity assessment	Main outcomes
TiO ₂ photocatalysis (Talwar et al., 2018)	Laboratory scale (UVC 20 W/m ² ; commercial TiO ₂ (Degussa)) <u>Optimal conditions:</u> TiO ₂ 0.6 g/L, pH 3.2, time 455 min	Real pharmaceutical industry WW. COD 12425 mg/L; BOD 1727 mg/L; pH 5.8; TDS 1600 mg/L; TSS 3180 mg/L; TS 4780 mg/L; BOD ₅ /COD 0.178.	<i>E.Coli</i> DH- α strain (Kirby-Bauer method)	Based on toxicity assessment it was suggested that photocatalytically treated pharmaceutical wastewater was not toxic.
TiO ₂ photocatalysis (Degussa P25) Jallouli et al. (2018)	Laboratory scale (UVA-LEDs 375 W/m ² ; TiO ₂) <u>Optimal conditions:</u> natural pH and TiO ₂ loading 2.5 g/L for both municipal and pharmaceutical wastewater	Municipal WW effluent spiked with <i>Vibrio fischeri</i> ibuprofen (6 µg/L, 6 mg/L or 213 mg/L); DOC 215 mg/L; pH 7.3; conductivity 610 µS/cm. Pharmaceutical industry WW was also used: DOC 170 mg/L; pH 7.9; conductivity 3770 µS/cm; concentration of ibuprofen 213 mg/L.	<i>Vibrio fischeri</i> bioluminescence inhibition rate of municipal (spiked with 213 mg/L of ibuprofen) and pharmaceutical WW before photocatalysis was 78.3% and 73.9%, respectively. After 240 min of (optimal conditions) toxicity of both types of water significantly decreased leading to inhibition rates of 40.8% and 30.3% for municipal and pharmaceutical WW, correspondingly.	
TiO ₂ photocatalysis (Vela et al., 2018b)	Pilot scale (CPC plant; commercial TiO ₂ : Degussa P25 and Krono vlp 7000). <u>Optimal conditions:</u> TiO ₂ 200 mg/L and Na ₂ S ₂ O ₈ 250 mg/L	Sewage WW effluent spiked with malathion, fenotrothion, quinalphos, vinclozoline, dimethoate, fenamol phthalate (0.3 mg/L of each one). COD 33.1 mg/L; DOC 10.8 mg/L; BOD ₅ 5 mg/L; SS 3.6 mg/L; turbidity 1.1 UNT; pH 7.2.	<i>Vibrio fischeri</i>	Initial value of <i>Vibrio fischeri</i> inhibition (60%, untreated wastewater) dropped to 27 ± 6% (after treatment with vlp 7000) and 15 ± 4% (after treatment with P25) after 240 min. For both photocatalysts significant increase of toxicity was observed after about 90 min of treatment, which was associated with generation of some stable intermediates.
TiO ₂ photocatalysis (Saverini et al., 2012)	Laboratory scale (MP lamp intensity of irradiation reaching solution (320 nm) 10 mW/cm ² ; TiO ₂ :Degussa P25) <u>Optimal conditions:</u> TiO ₂ 0.4 g/L	Treated WW from citrus fruit transformation factory was used for photocatalytic experiments TOC 21 mg/L	Ames test (<i>S.typhimurium</i> strain TA100), viability of V79 Chinese hamster cells and Comet assay	High level of genotoxicity was observed for both types of WW (before and after treatment with activated sludge). Results of Comet assay demonstrated that 30% of V79 cells (after 1 h treatment with 100 µL of wastewater) were damaged. Exposure of <i>S.typhimurium</i> to water samples collected within 2 h of photocatalytic test indicate relatively high level of genotoxicity, which significantly decreased after 2 h of photocatalysis. Spiked PhACs inhibited growth of all tested microorganisms, among which green algae was the most sensitive (almost 100% of inhibition before treatment). After 96 h of treatment, growth inhibition of green algae decreased from almost 100%–60%. Significant toxicity decline was observed for blue-green algae (from 70% of growth inhibition to ~20%). No significant changes of <i>Vibrio fischeri</i> growths inhibition were observed during and after treatment.
TiO ₂ coated sand (He et al., 2016)	Laboratory scale (Xenon lamp 159 lux) <u>Optimal conditions:</u> depth of water column 0.1 m and 96 h of irradiation.	Effluent from urban WWTP spiked with PhACs (propranolol, diclofenac, carbamazepine, ibuprofen with concentration 5 mg/L each). BOD 6 mg/L; COD 35.2 mg/L; DOC 12.2 mg/L; pH 7.3.	<i>Pseudokirchneriella subcapitata</i> , <i>Anabaena flos-aquae</i> and <i>Vibrio fischeri</i>	Based on results obtained with <i>D. similis</i> the toxicity of wastewater effluent was relatively low (EC ₅₀ 70.7%). After photocatalytic treatment with TiO ₂ , the toxicity of effluent decreased and EC ₅₀ was 95%. Interestingly, when HT/Fe/TiO ₂ was applied, the toxicity of treated effluent was higher (EC ₅₀ 78.6%) than in case of TiO ₂ . The inhibition of <i>V. fischeri</i> exposed to WW before treatment was 70%. Slight increase of <i>V. fischeri</i> inhibition was detected after 30 min. After solar photocatalysis at optimal conditions (240 min)
Photocatalysis with TiO ₂ and TiO ₂ modified with hydrotalcite and iron oxide (HT/Fe/TiO ₂) Arcanjo et al. (2018)	Laboratory scale (mercury vapor lamp; TiO ₂ and HT/Fe/TiO ₂). <u>Optimal conditions:</u> TiO ₂ (2 g/L and pH 4) and HT/Fe/TiO ₂ (2 g/L and pH 10)	Textile mill WW effluent (secondary). COD 78 mg/L; DOC 25.7 mg/L; turbidity 15 TU; pH 9; conductivity 1608 µS/cm.	<i>Daphnia similis</i>	(continued on next page)
ZnO photocatalysis (Vela et al., 2018a)	Pilot scale (CPC plant; UVC, UVB, UVA, VIS + NIR were 0.2 ± 0.1 W/m ² , 2.1 ± 0.6 W/m ² , 29.2 ± 4.1 W/m ² , 1011.6 ± 66.2 W/m ² , respectively). <u>Optimal conditions:</u> ZnO 200 mg/L and Na ₂ S ₂ O ₈ 250 mg/L	Sewage WW effluent spiked with endocrine disruptors. COD 33.1 mg/L; DOC 10.8 mg/L; BOD ₅ 5 mg/L; SS 3.6 mg/L; turbidity 1.1 UNT; pH 7.2.	<i>Vibrio fischeri</i>	The inhibition of <i>V. fischeri</i> exposed to WW before treatment was 70%. Slight increase of <i>V. fischeri</i> inhibition was detected after 30 min. After solar photocatalysis at optimal conditions (240 min)

Table 1 (continued)

AOP Process and Reference	Experimental conditions	Type of the water	Toxicity assessment	Main outcomes
ZnO photocatalysis (Hasegawa et al., 2014)	L. Concentration of oxygen 8–10 mg/L. Laboratory scale (mercury vapor lamp 1850 μW/cm ² ; ZnO). <u>Optimal conditions:</u> ZnO 1 g/L; pH 8.0 and irradiation time 4h.	Effluent from leather industry (filtered and diluted in distilled water). COD 15 023 ± 60 mg/L; TOC 4685 mg/L; BOD ₅ 4374 ± 0.1 mg/L; turbidity 331.0 ± 0.02 NTU; pH 3.5 ± 0.7.	<i>Artemia salina</i> L.	inhibition of <i>Vibrio fischeri</i> significantly decreased (11 ± 5%). The LC ₅₀ of <i>Artemia salina</i> L. was 14.9% after 24h of exposure to raw wastewater. After photocatalytic treatment at optimal conditions the LC ₅₀ was 56.82%. Results indicate that toxicity of wastewater was decreased after photocatalysis with ZnO.
TiO ₂ and ZnO photocatalysis (Çifci and Meric, 2015)	Laboratory scale (16 UVA lamps 5.62 mW/cm ² ; TiO ₂ and ZnO). <u>Optimal conditions:</u> TiO ₂ : pH 5, TiO ₂ 2 g/L, reaction time 3h; ZnO: pH 9, ZnO 2 g/L, reaction time 3h.	Two WW effluents from dyeing and finishing textile industry (WW1 and WW2). WW1: total COD 370 ± 74 mg/L, soluble COD 230 ± 15 mg/L, TOC 61 mg/L, pH 7.94, conductivity 5.15 μS/cm, alkalinity 436 mg CaCO ₃ /L. WW2: total COD 90 ± 9 mg/L, soluble COD 70 ± 4 mg/L, TOC 60 mg/L, pH 7.65, conductivity 4.50 μS/cm, alkalinity 246 mg CaCO ₃ /L.		When TiO ₂ was applied for treatment of WW1 at optimal conditions, the toxicity of water drastically increased at 120 min contact time. This was attributed to formation of long chain byproducts after decomposition of aromatic compounds. After 180 min no toxicity was observed. When ZnO was used for treatment of WW2 at optimized conditions, slight increase of toxicity occur at 150 min of reaction (similar reason as in case of TiO ₂). No toxicity was detected after 180 min of photocatalytic treatment.
Photocatalysis with TiO ₂ , ZnO and Nb ₂ O ₅ (Souza et al., 2016)	Laboratory scale (mercury vapor lamp; TiO ₂ Kronos, TiO ₂ Degussa P25, ZnO Dynamic and Nb ₂ O ₅ , BCMM). <u>Optimal conditions:</u> pH 3, concentration of photocatalyst 0.25 g/L, 300 min	Textile effluent from jeans industrial laundry. COD 558.50 ± 5.05 mg/L, BOD _{5, 20°} 170 mg/L, turbidity 113.0 ± 2.7 NTU	<i>Artemia salina</i>	Values of LC ₅₀ of <i>Artemia salina</i> before and after photocatalytic treatment (300 min, pH 3 and concentration of photocatalyst 0.25 g/L) were as follow: Effluent: 27.59%; TiO ₂ –P25: 90.86%; TiO ₂ Kronos: 61.62%; ZnO: 66.56%; Nb ₂ O ₅ : 77.52%. Results indicate that toxicity of textile wastewater effluent significantly decreased after photocatalytic treatment.
Photocatalysis with polypyrrole (Lima et al., 2015)	Laboratory scale (300 W Osram lamp 108 kJ/m ² ; polypyrrole) <u>Optimal conditions:</u> polypyrrole 5 mg/mL; 120 min	Textile WW. COD 1111.04 mg/L; TOC 156.75 mg/L	<i>Artemia salina</i> .	Results demonstrated 96.7% of <i>Artemia</i> survival after treatment, indicating that treated water is relatively not toxic. Interestingly toxicity tests were not shown for wastewater before treatment.
Photocatalytic ozonation O ₃ /UV/TiO ₂ (Tichonovas et al., 2017)	Laboratory scale (LP lamp; TiO ₂ (Aeroxide P25, Evonik) deposited on glass rods; O ₃ concentration 1.3 mg/L, air flow rate 11 L/min) <u>The best conditions among tested AOPs:</u> the most efficient AOPs were as follows TiO ₂ /UV/O ₃ > UV/O ₃ > TiO ₂ /UV. The	Furniture industry WW after primary treatment. WW diluted 124.4 times: COD 50 mg/L; COD 130 mg/L; conductivity 186 μS/cm; pH 6.7	<i>Daphnia magna</i>	TiO ₂ /UV/O ₃ process (most efficient): mortality (%) of <i>Daphnia magna</i> for initial wastewater was 13% after 72h. It drastically increased during treatment, thus, reaching almost 100% (48h and 72h) from 20 to 40 min. During 80–100 min, mortality drastically decreased reaching zero after 60 min (24h of exposure), 100 min (48h of exposure) and about 13% of mortality after 100 min for 72h of exposure. It was reported that treated wastewater was safe based on conducted toxicity assessment with daphnia.
UV/O ₃ /ZnO (Biglari et al., 2017)	Laboratory scale (UV lamp 254 nm, 1020 μW/cm ² ; ZnO) <u>Optimal conditions:</u> ZnO 0.1 g/L, pH 5, O ₃ 9.2 mg/min, irradiation time 30 min.	WW effluent (pulp and paper industry). COD 4751 mg/L, BOD 386 mg/L, pH 6.2–8.7, iron 0.28 mg/L, bicarbonate 280 mg/L, phenol 61 ± 2 mg/L	<i>Daphnia</i>	
UV and solar photocatalytic ozonation (Mecham et al., 2017)	Laboratory scale (MP lamp and sun; TiO ₂ and modified TiO ₂ photocatalysts)	Secondary WW effluent (spiked with 5000 μg/L of phenol). pH 6.8, COD 42 mg/L, DOC 20 mg/L	MTT assay with Vero cells	Significant toxic effect was observed for untreated WW effluent (cell viability 28.7%). After application of photocatalytic ozonation the toxicity significantly decreased, leading to cell viability of 76% (UV/O ₃ /TiO ₂) and 80% (UV/O ₃ /TiO ₂ –Fe). After solar photocatalytic ozonation the cell viabilities were 58% (solar/O ₃ /TiO ₂) and 69% (solar/O ₃ /TiO ₂ –Fe).

Table 1 (continued)

AOP Process and Reference	Experimental conditions	Type of the water	Toxicity assessment	Main outcomes
O ₃ /H ₂ O ₂ O ₃ /UV O ₃ /Xe/Ce–TiO ₂ O ₂ /Xe/Ce–TiO ₂ (Santiago-Morales et al., 2012)	Laboratory scale (gas flow 0.19 N/m ³ h, O ₃ concentration 22 g/Nm ³ ; LP from municipal WWTP spiked with (6.01 ± 10 ⁻⁶ E/L) and Xe-arc (1.05 ± 10 ⁻⁶ E/L) lamps) <u>Optimal conditions:</u> H ₂ O ₂ (when applied) 30 µL/L, concentration of photocatalyst (when applied) 200 mg/L	Effluent from secondary clarifier 500 ng/L of galoxilide and tonalide was used. pH 7.79, COD 28 mg/L, NPOC 8.1 mg/L, CaCO ₃ 219 mg/L	<i>Pseudokirchneriella subcapitata</i> , <i>Vibrio fischeri</i> and <i>Daphnia magna</i>	<i>P. subcapitata</i> bioassay: the toxicity increased after 15 min of treatment by photolysis (UV and Xe lamps), O ₃ /H ₂ O ₂ and Xe/Ce–TiO ₂ photocatalysis. After 15 min of O ₃ , O ₃ /UV and O ₃ /Ce–TiO ₂ treatment, toxicity of water decreased. <i>Daphnia magna</i> : For all tested processes toxicity decreased. Immobilisation observed in raw WW was about 15%, after majority of tested processes this value was about 5%. <i>Vibrio fischeri</i> : Toxicity of waster increased after 15 min of photolysis and Xe/Ce–TiO ₂ process. Decrease of toxicity was observed after applied O ₃ /UV, O ₃ /Xe and O ₃ /Ce–TiO ₂ .
Hybrid photocatalysis-based processes				
Combination of photocatalysis, photo-Fenton and iron oxide catalysis using Fe–TiO ₂ composite beds (Bansal et al., 2018)	Laboratory (UVA lamps 23 ± 2 W/m ²) and pilot scale experiments (mean intensity of solar UV + Visible light 788W/m ²) <u>Optimal conditions:</u> H ₂ O ₂ dose: 1155 mg/L, pH 3–3.5, process time 6h and dose of Fe–TiO ₂ equal to 102% area of reactor bed covered with composite beds (under artificial radiation source).	Real effluent from pharmaceutical industry. COD 4800 mg/L; BOD 830 mg/L; TDS 1320 mg/L; TSS 620 mg/L; turbidity 742 NTU; pH 5.07; chloride 25 mg/L; sulfate 526 mg/L.	<i>E.coli</i> (The Kirby-Bauer method) and zebra fish.	The Kirby-Bauer method: The biggest inhibition zone against <i>E.coli</i> was reported for untreated WW. During treatment, the inhibition zone was decreasing, which corresponds to decrease of toxicity. Zebra fish bioassay: After 96h of bioassay zebra fish survival level was 100. The zebra fish toxicity assay was not conducted for untreated wastewater. <i>V. fischeri</i> (5 min): 87% of inhibition (before treatment) and 10% (after 247.34 min); <i>V. fischeri</i> (15): 91% of inhibition (before treatment) and 18% (after 247.34 min). The EC ₅₀ values (15 min) significantly increased during treatment process. <i>Sinapis alba</i> was more sensitive to raw wastewater than other tested plants.
Solar-induced Fenton-assisted TiO ₂ photocatalytic hybrid process (Tsoumachidou et al., 2017)	Bench (UVA lamp 1.232 · 10 ⁻⁴ E/min) and pilot scale (solar radiation) <u>Optimal conditions:</u> TiO ₂ 0.5 g/L, H ₂ O ₂ 0.5 g/L, Fe ³⁺ 0.0035 g/L	Synthetic effluent simulating the actual grey WW. DOC 93 mg/L; pH 3.36; conductivity 47.6 µS/cm	<i>Vibrio fischeri</i> , <i>Sorghum saccharatum</i> , <i>Lepidium sativum</i> , <i>Sinapis alba</i>	<i>Kraft pulp mill effluent</i> : toxicity of water after photocatalytic treatment with TiO ₂ (0.5 g/L and 0.75 g/L) and Fe ₂ O ₃ (0.25 g/L and 1.0 g/L) slightly decreased. But the increase of toxicity was observed when other concentrations of TiO ₂ (0.25 g/L and 1.0 g/L) and Fe ₂ O ₃ (0.5 g/L and 0.75 g/L) were applied. Photocatalysis in combination with H ₂ O ₂ was more efficient for removal of toxicity with best results attributed to Fe ₂ O ₃ and 75 mM of H ₂ O ₂ . <i>Mining effluent</i> : toxicity decreased when photocatalytic treatment was applied using TiO ₂ and Fe ₂ O ₃ . Addition of H ₂ O ₂ led to decrease of toxicity, except in case of 5 min exposure when toxicity increased.
TiO ₂ /UV and Fe ₂ O ₃ /UV TiO ₂ /H ₂ O ₂ /UV and Fe ₂ O ₃ /H ₂ O ₂ /UV (Nogueira et al., 2017)	Laboratory scale (UV lamp with emission peak at 312 nm; commercial TiO ₂ and Fe ₂ O ₃). <u>Optimal conditions:</u> for pulp mill effluent: pH 3.0, TiO ₂ 0.75 g/L; Fe ₂ O ₃ 0.75 g/L, concentration of H ₂ O ₂ 75 mM. For mining WW: TiO ₂ 1 g/L; L, Pb 13.5 ± 1.05 µg/L, Cd Fe ₂ O ₃ 1 g/L.	Bleach kraft pulp mill secondary WW effluent: COD 391 ± 2 mg/L, pH 8.8 ± 0.05. Acid mine drainage: pH 2.58 ± 0.07, S 402.3 ± 1.8 mg/L, Cu 1.0 ± 0.05 mg/L, Zn 48.0 ± 1.6 mg/L, As 1.2 ± 0.15 µg/L, Al 74.0 ± 0.7 mg/L, Cd 56.2 ± 1.5 µg/L	<i>Vibrio fischeri</i>	<i>Kraft pulp mill effluent</i> : toxicity of water after photocatalytic treatment with TiO ₂ (0.5 g/L and 0.75 g/L) and Fe ₂ O ₃ (0.25 g/L and 1.0 g/L) slightly decreased. But the increase of toxicity was observed when other concentrations of TiO ₂ (0.25 g/L and 1.0 g/L) and Fe ₂ O ₃ (0.5 g/L and 0.75 g/L) were applied. Photocatalysis in combination with H ₂ O ₂ was more efficient for removal of toxicity with best results attributed to Fe ₂ O ₃ and 75 mM of H ₂ O ₂ . <i>Mining effluent</i> : toxicity decreased when photocatalytic treatment was applied using TiO ₂ and Fe ₂ O ₃ . Addition of H ₂ O ₂ led to decrease of toxicity, except in case of 5 min exposure when toxicity increased.
Solar photocatalysis and photo-Fenton (Brienza et al., 2016)	Pilot scale (average UV intensity 70 W/m ²) <u>Optimal conditions:</u> TiO ₂ (Evonik P25) 0.7 g/L; solar photo-Fenton was conducted with 100 µM of iron sulfate, 200 µM of monopersulfate and sulfuric acid (initial pH of water was adjusted to 2.6).	Municipal WW effluent after biological treatment. TOC 26.3 ± 0.6 mg/L; conductivity 669 ± 21 µS/cm; pH 7.2 ± 0.2.	<i>Vibrio fischeri</i> , <i>Daphnia magna</i> , <i>Pseudokirchneriella subcapitata</i> , <i>Brachionus calyciflorus</i> , estrogenic tests (HELN ERα cell line); <i>In vitro</i> genotoxicity assessment (LS 174T cell line)	The EC ₅₀ values obtained for <i>V. fischeri</i> , <i>D. magna</i> , <i>P. subcapitata</i> , and <i>B. calyciflorus</i> for initial WW were 80%, 90%, 98% and 90%, respectively (non-toxic). Estrogenic activity was detected in raw WW even when estrogen was not possible to analyse by chemical analysis. Estrogenic activity did not decrease after solar photolysis, while after photocatalysis and photo-Fenton it was reduced. Genotoxicity before and after applied treatments was not detected.

(continued on next page)

Table 1 (continued)

AOP Process and Reference	Experimental conditions	Type of the water	Toxicity assessment	Main outcomes
<i>Catalytic ozonation</i>				
Heterogeneous catalytic ozonation (Zhuang et al., 2014)	Laboratory scale <i>Optimal conditions:</i> sewage sludge based AC impregnated with Mn and Fe (1 g/L) and ZnCl ₂ as activation agent was used. O ₃ flow 500 mL/min, O ₃ concentration 15 mg/L.	Lurgi coal gasification WW after biological treatment was used. COD 130–180 mg/L, BOD ₅ /COD 0.05–0.07, TOC 45–60 mg/L, bicarbonate 40–60 mg/L, pH 6.5–7.5.	<i>Daphnia magna</i>	Changes in acute toxicity were monitored on the course of catalytic ozonation. Residual ozone was eliminated before toxicity assessment. Inhibition rate observed for WW prior catalytic ozonation was about 65%. Toxicity was decreasing during treatment reaching highest detoxification (15%) with Mn impregnated catalyst. During zonation slight increase of toxicity was detected in the beginning of the treatment. Catalytic ozonation was more efficient than ozonation for wastewater detoxification.
Heterogeneous catalytic ozonation (Wu et al., 2016)	Catalyst: iron shavings (38CrMoAl steel) 20 g/L; O ₃ 10.8 mg/L	WW effluent from dyeing and finishing industry. COD 142 ± 6 mg/L, DOC 44 ± 1 mg/L, BOD ₅ 1.0 ± 0.5 mg/L, pH 7.37 ± 0.14.	<i>Photobacterium phosphoreum</i>	The inhibition of bacteria for wastewater effluent before catalytic ozonation was 51%, whereas after treatment it was 33%. Results suggested decrease of wastewater effluent toxicity.
Heterogeneous catalytic ozonation (Ma et al., 2018)	Pilot scale (catalyst: iron shavings). <i>Optimal conditions:</i> O ₃ dosage 10.2 O ₃ /min, hydraulic retention time 30 min.	WW effluent from dyeing and finishing industry. COD 165 ± 20 mg/L, DOC 76 ± 6 mg/L.	<i>Photobacterium phosphoreum</i>	After treatment of wastewater by catalytic ozonation at optimal conditions, the toxicity slightly decreased. Thus, the inhibitory effect for untreated wastewater was 29.3 ± 3% and for treated affluent 25 ± 2%

3. Photocatalysis

Usually photocatalysis is defined as the chemical reaction induced by the absorption of photons by solid material (photocatalyst) (Ohtani, 2011). However, there is still some debate regarding the definition of the photocatalytic process (Mills and Le Hunte, 1997). It should be mentioned that the photocatalyst does not undergo any chemical changes during and after the reaction. In the literature, the term "photocatalyst" is often used interchangeably with term "catalyst". It can be probably explained by the fact that some photocatalytic materials are sometimes used in catalytic reactions as catalysts. However, in terms of thermodynamics, the concept of catalysis and photocatalysis is different. Thus, energy-storing reactions can be driven by photocatalysis ($\Delta G > 0$) while catalysis is limited to thermodynamically possible reactions ($\Delta G < 0$) (Ohtani, 2010). The reaction rate (absolute or relative) of the photocatalytic process is usually referred as photocatalytic activity (Ohtani, 2011). Usually five steps are distinguished during photocatalysis (Herrmann, 1999):

- transfer of pollutants to the photocatalyst's surface;
- adsorption of pollutants on the surface;
- photonic activation and decomposition of adsorbed molecules;
- reaction product's desorption;
- removal of reaction products from the photocatalyst's surface.

The main principle of photocatalysis can be explained according to the widely accepted theory. The electron-hole pairs are generated when photocatalytic material is exposed to the light with equal or larger energy than that of photocatalyst's band gap. Formed electron-hole pairs dissociates into electrons (e⁻) in conduction band and holes (h⁺) in valence band. The e⁻ and h⁺ lead to the reduction and oxidation of molecules adsorbed on the surface of photocatalytic material. Nevertheless, the electron-hole recombination often takes place, which may lead to the non-occurrence

of oxidation and reduction reactions on the surface of photocatalytic material. The increase or decrease of the reaction rate is often associated with an enhanced or suppressed electron-hole recombination, respectively (Ohtani, 2013). According to a recent review in the field (Ohtani, 2013), no direct evidence of electron-hole recombination during photocatalytic process was presented so far.

Photocatalytic ozonation takes place in the presence of photocatalyst, UV-vis radiation and ozone. Aside from occurring photocatalytic reaction, caused by the photoexcitation of the photocatalyst's surface, molecules of ozone adsorbed on the surface of photocatalyst. This leads to the formation of active oxygen radicals. It was demonstrated that water molecules react with active oxygen radicals to form hydroxyl radicals (Huang and Li, 2011). Moreover, active oxidising species are produced when ozone absorbs a wavelength shorter than 300 nm (Mehrjouei et al., 2015).



3.1. Technical challenges and toxicity

A plethora of studies has been conducted on the photocatalytic treatment of wastewater effluents at lab and pilot scale (Berberidou et al., 2017; Karaolia et al., 2018; Levchuk et al., 2015; Spasiano et al., 2015; Talwar et al., 2018). In many cases, the complete mineralisation of pollutants present in wastewater was not achieved and/or was not expected. In such cases, conventional chemical analysis, which allows to detect and quantify target compounds and their by-products, is limited because it is neither able to evaluate the possible toxicity of the formed compounds nor their potential synergistic effect. Therefore, a toxicity assessment is of crucial importance when wastewater is treated by photocatalysis, especially if the complete mineralisation of contaminants is not an objective.

3.1.1. Photocatalytic materials and their possible contribution to toxicity

3.1.1.1. In the form of powder. In the majority (~60%) of studies devoted to the photocatalytic detoxification of real wastewater, TiO₂ in the form of nanoparticles was used as an aqueous suspension in the contaminated water, also called 'slurry'. This can be explained by the fact that TiO₂ possess almost all the characteristics of ideal photocatalytic material (Carp et al., 2004) and it is one of the most studied materials for photocatalytic applications. The nanoparticles of ZnO were applied for photocatalytic wastewater treatment in less than 25% of the studies reviewed in this article. ZnO was widely studied for photocatalytic applications, it benefits from relatively high photocatalytic activity, easy production process, low cost, environmentally friendliness, etc. (Qi et al., 2017). However, the possible photocorrosion of ZnO should be mentioned as an important drawback (Kudo and Miseki, 2009). Interestingly, the photodissolution of Zn was reported during the photocatalytic treatment of sewage wastewater effluent with ZnO and it was also suggested to be one of the factors leading to the increase of toxicity (*Vibrio fischeri* bioassay) (Vela et al., 2018a). Thus, the elevated toxicity was observed when the highest concentrations of Zn²⁺ (186 ± 8 µg L⁻¹) were detected in treated water (Vela et al., 2018a). In comparison with ZnO, the dissolution of Ti⁴⁺ in similar wastewater was reported to be significantly lower (6.1 ± 1.3 µg L⁻¹). These results are in agreement with other studies, which have demonstrated that dissolution of metal from metal-containing nanoparticles can play key role in enhancement of their toxicity (Boyle and Goss, 2018; Brunner et al., 2006; Franklin et al., 2007; Käkinen et al., 2016; Wang, et al., 2009). It should be noted that the dissolution and/or photodissolution of photocatalysts is not often monitored during treatment; while it is an important parameter which can significantly affect the toxicity of the water especially if toxic metals such as cadmium are used for the synthesis of photocatalysts. It is noteworthy that TiO₂ was demonstrated to be more efficient for the reduction of toxicity (based on *Artemia salina* bioassay) of textile wastewater effluent than ZnO (Souza et al., 2016). Moreover, TiO₂ P25 was reported to be more efficient for the elimination of toxicity (*Vibrio fischeri* bioassay) of sewage wastewater effluent than other commercially available TiO₂ (Vela et al., 2018b). It can be expected that more studies will focus on comparison of various photocatalysts for toxicity elimination in the future. Besides TiO₂ and ZnO, rather few photocatalysts were tested in the last ten years for the reduction of wastewater toxicity such as TiO₂ modified with hydrotalcite and iron oxide (Arcanjo et al., 2018), polypyrrole (Lima et al., 2015), Nb₂O₅ (Souza et al., 2016), Fe₂O₃ (Nogueira et al., 2017), graphitic carbon nitride (Moreira et al., 2019).

Despite the relevantly high efficiency of photocatalysts used in the form of dispersed powder for the degradation of emerging organic pollutants and reduction of toxicity, the practical application of this process is hardly feasible due to the technical challenges arising when photocatalyst should be separated from water for further reuse. The separation step is currently among the major limitations for the application of photocatalysis in practice (Chong et al., 2010; Fernández-Ibáñez et al., 2003; Iglesias et al., 2016). Relatively few studies have been reported on the separation of photocatalysts from treated water such as accelerated sedimentation (Fernández-Ibáñez et al., 2003), coagulation with chemical - (Kagaya et al., 1999) and plant-based coagulants (Patchaiyappan et al., 2016), and different filtration methods (Doll and Frimmel, 2005; Ganju et al., 2015; Zhao et al., 2002). Among the works considered in the scope of this review, a particle agglomeration process of materials after treatment (Souza et al., 2016) as well as the magnetic separation of TiO₂ modified with hydrotalcite and iron (Arcanjo et al., 2018) was conducted. Another point of concern

is the photocatalyst's efficiency loss during its reuse (deactivation) reported by various researchers (Li et al., 2009; Ollis, 2000; Sun et al., 2003). The deactivation of a photocatalyst can be reversible and irreversible (Sauer and Ollis, 1996). As suggested by Ollis (2000), the probable reasons for deactivation are: (1) accumulation of resistance to photocatalysis by-products on the surface of photocatalyst and (2) generation of surface species possessing higher adsorption capacity than reactants. The deactivation of photocatalyst is usually not observed when experiments are conducted with model pollutants in water (Ahmed and Ollis, 1984; Al-Sayed et al., 1991; Hidaka et al., 1986; Levchuk et al., 2016a,b). For instance, the deactivation of TiO₂ was not observed after 14 cycles of the photocatalytic degradation of 2,4,5-trichlorophenoxyacetic acid (Barbeni et al., 1987). However, in more complex water matrix and/or in the presence of salts (for instance, coagulants), the deactivation of photocatalyst occurs (Fernández-Ibáñez et al., 2003). Only in 17% of articles on photocatalytic detoxification and purification of wastewater, photocatalytic activity during the reuse of materials was studied. For instance, Arcanjo and co-authors have reused HT/Fe/TiO₂ five times for textile wastewater effluent treatment and observed approx. 17% of its efficiency loss (based on color removal) (Arcanjo et al., 2018). The photocatalytic activity of Fe-TiO₂ composited beds was reported to be very similar even after 70 cycles (based on COD removal) of the hybrid photocatalysis process (Bansal et al., 2018). Lima and co-authors (Lima et al., 2015) reported the deactivation of polypyrrole of approx. 67% after six cycles of textile wastewater decontamination. Interestingly, when a polymer was washed with HCl solution after reaction, the efficiency loss was significantly lower (approx. 16% after six cycles) (Lima et al., 2015). It should be noted that there are only few studies concerned with such an important topic as the regeneration of photocatalytic materials. The following strategies were tested for the regeneration of photocatalysts used for water/wastewater treatment:

- alkaline treatment (NaOH and NH₄OH) (Miranda-García et al., 2014);
- thermal regeneration (Carp et al., 2004);
- exposure to UV in aqueous media or air (Wang et al., 2015);
- oxidation of by-products bounded to the surface by H₂O₂/UV (Miranda-García et al., 2014);
- washing with deionised water (Kabra et al., 2004);
- refluxing in water at 100 °C with oxygen bubbling (Pan et al., 2013).

Miranda-García and co-authors compared the thermal, alkaline and H₂O₂/UV approaches for the regeneration of immobilised TiO₂ (based on photocatalytic degradation of emerging pollutants) (Miranda-García et al., 2014). Thermal and H₂O₂/UV treatment were reported to be more efficient. Interestingly, after NaOH regeneration, TiO₂ was partially removed leading to the decrease of photocatalyst's efficiency (Miranda-García et al., 2014). It can be expected that more research devoted to separation/recovery and reuse of photocatalytic materials will be conducted in the future, taking into account its significant importance for the practical application. Beyond the technical challenges of the separation and reuse of photocatalysts, the possible risks to aquatic organisms due to the release of some nanoparticles to water should be mentioned as well as the generation of sludge, containing nanoparticles of photocatalysts. When nanoparticles are introduced to aquatic environment their fate (aggregation and its reversibility) is strongly dependant on pH, quality and quantity of natural organic matter, type of released nanoparticles and their surface properties, dissolved and particulate inorganic compounds etc. (Bundschuh et al., 2018). Studies on fate of nanoparticles in the environment are

emerging (Boxall et al., 2007; Klitzke et al., 2015; Metreveli et al., 2015; Tso et al., 2010), and behaviour of nanoparticles in complex environmental conditions is not fully understood (Bundschuh et al., 2018). Studies devoted to the risk assessment of nanomaterials used for photocatalytic water treatment to aquatic organisms are available (Lee et al., 2009; Nogueira et al., 2015; Vevers and Jha, 2008). Thus, adverse effects on invertebrates and fish by TiO₂ nanoparticles were reported (Blaise et al., 2008). Lethal toxicity was reported for *Chironomus riparius* (widely used organism for the assessment of sediment toxicity) exposed for 10 days to artificial sediments mixed with residual (after photocatalytic treatment) nanoparticles of TiO₂ and Fe₂O₃ used for the treatment of olive oil mill wastewater and Fe₂O₃ used for the treatment of kraft pulp mill effluent (Nogueira et al., 2015). Interestingly, toxicity depended not only on the type on nanoparticles, but also on the type of contaminants adsorbed on the NPs surface. For instance, TiO₂ and Fe₂O₃ NPs after the treatment of mine drainage did not promote any negative effects on *Chironomus riparius* (Nogueira et al., 2015). It is not surprising that many studies focus on toxicity assessment of nanoparticles in presence of different contaminants (organic and inorganic) (Ahamed et al., 2019; Canesi et al., 2015; De La Torre Roche et al., 2018; Hartmann et al., 2012; Martín-de-Lucía et al., 2019) as nanoparticles may possibly play role of carrier (Hartmann and Baun, 2010) of organic and/or inorganic pollutants into cells and/or organisms (Kahru and Dubourguier, 2010). For instance, it was reported that metal uptake in various freshwater organisms increases in presence of TiO₂ nanoparticles (Canesi et al., 2015; Fan et al., 2017; Hartmann et al., 2012). More detailed information devoted to toxicity of nanoparticles can be find in excellent reviews (Du et al., 2018; Menard et al., 2011; Turan et al., 2019).

3.1.2. Thin films. Photocatalytic slurry systems have been widely studied for treatment of urban and industrial wastewaters (Belgiorno et al., 2007; Biancullo et al., 2019; Fenoll et al., 2019; Moreira et al., 2018; Talwar et al., 2018; Threrujirapong et al., 2017). Despite high efficiency and relatively low price of slurry photocatalytic systems, it did not lead to many practical applications in wastewater treatment. This can be mainly explained by costly separation of photocatalyst from water after treatment (Bideau et al., 1995; Shan et al., 2010). Therefore, immobilisation of photocatalyst on inert supports/substrates in a form of thin films could significantly simplify the separation procedure and enhance applicability of photocatalytic process. Immobilisation of photocatalysts allows to avoid the possible release of NPs to water, sludge generation and also significantly decrease the cost of the treatment by eliminating the photocatalyst recovery step. However, relatively high preparation costs together with generally reported lower efficiency of immobilised photocatalyst (Levchuk et al., 2016a) are the main barriers for practical application of photocatalytic thin films. Interestingly, it was reported that immobilised photocatalyst can achieve a similar level of photocatalytic activity as commercial TiO₂ (P25) for industrial wastewater (IWW) treatment (Barndök et al., 2016). Sordo et al. (2010) demonstrated that the efficiency of fixed-bed reactor filled with TiO₂ immobilised on glass beds is similar to that of slurry photocatalytic system. Several studies were conducted with immobilised photocatalytic materials for wastewater treatment (Barndök et al., 2016; Gholami et al., 2018; Vaiano and Iervolino, 2018). However, to our knowledge, only a few studies were reported for real wastewater detoxification with immobilised thin films in the last ten years (Barndök et al., 2016; He et al., 2016; Tichonovas et al., 2017). The TiO₂ (He et al., 2016; Tichonovas et al., 2017) and Fe-TiO₂ (Barndök et al., 2016) were used as a photocatalysts. As far as the authors are aware, in the last ten years there were no works investigating such phenomena as the detachment of

photocatalytic films from substrate or the possible photo-dissolution of immobilised photocatalysts used for real wastewater treatment and its possible effect on water toxicity.

3.1.2. Radiation sources and type of wastewater

3.1.2.1. Radiation sources. The photocatalytic wastewater treatment process occurs mostly under UV radiation. The UV generation by conventional UV lamps is relatively expensive and causes the generation of highly toxic waste (during utilisation). From the economic and environmental point of view, solar energy can be considered as the best radiation source for photocatalysis. However, in countries with a moderate or low availability of natural solar energy, alternative radiation sources can be used. Taking into consideration the Minamata Convention on Mercury (United Nations, 2018) signed by 128 countries, the use of light emitting diodes (LEDs) is becoming more attractive. The number of studies on photocatalytic water treatment in which alternative UV sources, such as solar energy and light emitting diodes (LEDs) are used is increasing (Blanco-Galvez et al., 2006; Levchuk et al., 2015; Spasiano et al., 2015; Vilhunen et al., 2011). Thus, many photocatalysts active in solar and/or visible light have been developed recently (Booshehri et al., 2017; Bouhadoun et al., 2015; Iwase et al., 2013; Morawski et al., 2017; Ratova et al., 2019; Rosman et al., 2018; Sano et al., 2008). It is worth making a point that majority of these photocatalytic materials possess relatively low photocatalytic activity and quantum efficiency. Hence, photo-Fenton is often applied as alternative, despite its pH aggressiveness and requirements for consumables.

Pilot scale reactors for photocatalytic water treatment with LEDs as a radiation source are appearing in the market (Apria Systems, 2018). Taking into account, the fast development of LEDs, it can be expected that LEDs can reach the level of industrial implementation in the near future. In approx. 35% of the articles, the experiments were conducted under solar radiation. For the simulation of solar radiation, xenon arc lamps are often used (approx. 12% of the articles) (He et al., 2016). To the best of our knowledge only one article reported the detoxification and purification of real wastewater using UVA-LEDs as a radiation source in the last ten years (Jallouli et al., 2018). Considering the fast development of LED technology and advances achieved in this field in recent years it may be expected that more research will be conducted on the photocatalytic detoxification and purification of real wastewater using LEDs as a radiation source.

Conventional lamps are still utilised in research with various optical filters in order to study photocatalytic reaction under UVC, UVB and/or UVA radiation. It should be noted that in some articles the radiation intensity of the lamp is not provided and photocatalytic activity is shown as a function of time. Such representation of the experimental results, especially in the absence of lamp intensity, makes it extremely difficult to compare the results with other studies. If the electrical consumption of a lamp is provided, it can be possible to estimate the total energy supplied for the removal of one ppm of TOC or COD, but it is a tedious procedure given the actual conditions of reporting in the scientific literature.

3.1.2.2. Types of wastewater. When working with matrices of real wastewater (urban and/or industrial) a few issues should be taken into consideration. On the one hand high concentration of dissolved organic carbon (DOC) should be considered as it is competing for the oxidising radicals generated by applied AOP. In order to avoid this problem, biological treatment followed by AOP is often suggested to be applied for wastewater containing CECs, which are not highly toxic for biological process (Oller et al., 2011). In case when pollutants present in wastewater possess high toxicity for biological treatment, it is often proposed to apply first AOP and

then continue with a biological treatment when the toxicity level of the wastewater treated by AOP allows it. For wastewaters with extremely low concentrations of CECs nanofiltration (for pre-concentration of CECs) can be applied, after which reject water with high concentration of CECs can be treated by AOP (Miralles-Cuevas et al., 2014). On the other hand, there are other issues, such as high levels of carbonates in wastewater, which generally decrease the efficiency of applied AOP (possible solution – acidification of wastewater), phosphates and sulphates can poison and/or coagulate catalysts, etc.

As shown in Fig. 2, the majority of studies on the detoxification and purification of real wastewaters in the last ten years using photocatalysis and hybrid processes were conducted with industrial wastewaters. In more than 60% of the studies on photocatalytic wastewater detoxification, pre-treatment such as pH adjustment, decreasing concentration of carbonates in water, etc. was applied prior to the photocatalytic process. Both raw and treated industrial wastewater was studied. Therefore, the concentrations of TOC, COD and BOD strongly varied depending on the type of industry, type of the pre-treatment (if applicable), etc. It was reported that photocatalytic treatment can be successfully applied as a pre-treatment method (before biological treatment) for raw industrial wastewater leading to an increase of its biodegradability and decrease of toxicity (Talwar et al., 2018) as well as the post-treatment method (after biological treatment) for industrial wastewater effluents allowing decomposing toxic pollutants (Saverini et al., 2012).

To the best of our knowledge, no studies were reported in the last ten years on the photocatalytic detoxification and purification of industrial wastewater and/or wastewater effluents for water reuse and/or recycling. Approx. 40% of revised articles were devoted to the purification and detoxification of municipal wastewater (MWW) effluents. Among these studies, MWW was mostly used as a matrix for spiking emerging pollutants. Depending on the MWW effluent, the level of COD and dissolved organic carbon (DOC) concentrations were approx. 33–55 mg L⁻¹ and 10–13 mg L⁻¹, respectively. However, when the concentration of spiked

contaminants was relatively high, DOC was as high as 215 mg L⁻¹ (Jallouli et al., 2018). Taking into account relatively low levels of COD, TOC, emerging pollutants ($\mu\text{g L}^{-1}$ or ng L⁻¹) concentrations and disinfection in MWW effluents, it may be considered as a viable source for water reuse, e.g. for recreational and/or agricultural irrigation, although health risk assessment should be conducted due to potential presence of pathogens/CECs in treated water (Malchi et al., 2014). However, no studies on photocatalytic MWW effluent purification and detoxification considered the possible reuse of MWW effluent by now.

3.1.3. Toxicity

Different approaches for acute and chronic toxicity evaluation were applied so far for photocatalytically treated wastewater effluents such as bioassays with bacteria (He et al., 2016; Nogueira et al., 2017; Talwar et al., 2018), seawater invertebrates (Hasegawa et al., 2014; Lima et al., 2015; Souza et al., 2016), freshwater invertebrates (Çifçi and Meriç, 2015), microalgae (He et al., 2016), plants (phytotoxicity) (Tsoumachidou et al., 2017), mammalian cells (genotoxicity) (Saverini et al., 2012), etc. As reported in the majority of the studies, after the photocatalytic treatment, the toxicity of wastewater generally decreases. In approx. 44% of the studies on photocatalytic wastewater treatment, the toxicity was monitored on the course of photocatalytic treatment. Interestingly, in some studies a drastic increase of toxicity was reported during the treatment of MWW effluents (Vela et al., 2018a, 2018b) as well as industrial wastewater (Çifçi and Meriç, 2015; Saverini et al., 2012; Tichonovas et al., 2017). Such behaviour was observed when *Vibrio fischeri* (Vela et al., 2018a, 2018b), *Daphnia magna* (Çifçi and Meriç, 2015) and Ames test (Saverini et al., 2012) bioassays were applied. Generally, this phenomenon can be attributed to possible photodissolution of photocatalyst (Vela et al., 2018a), possible generation of more toxic by-products than parental compounds (Vela et al., 2018b) and/or synergistic toxic effects appearing due to the presence of many individual contaminants in water. An additional toxic effect can be produced

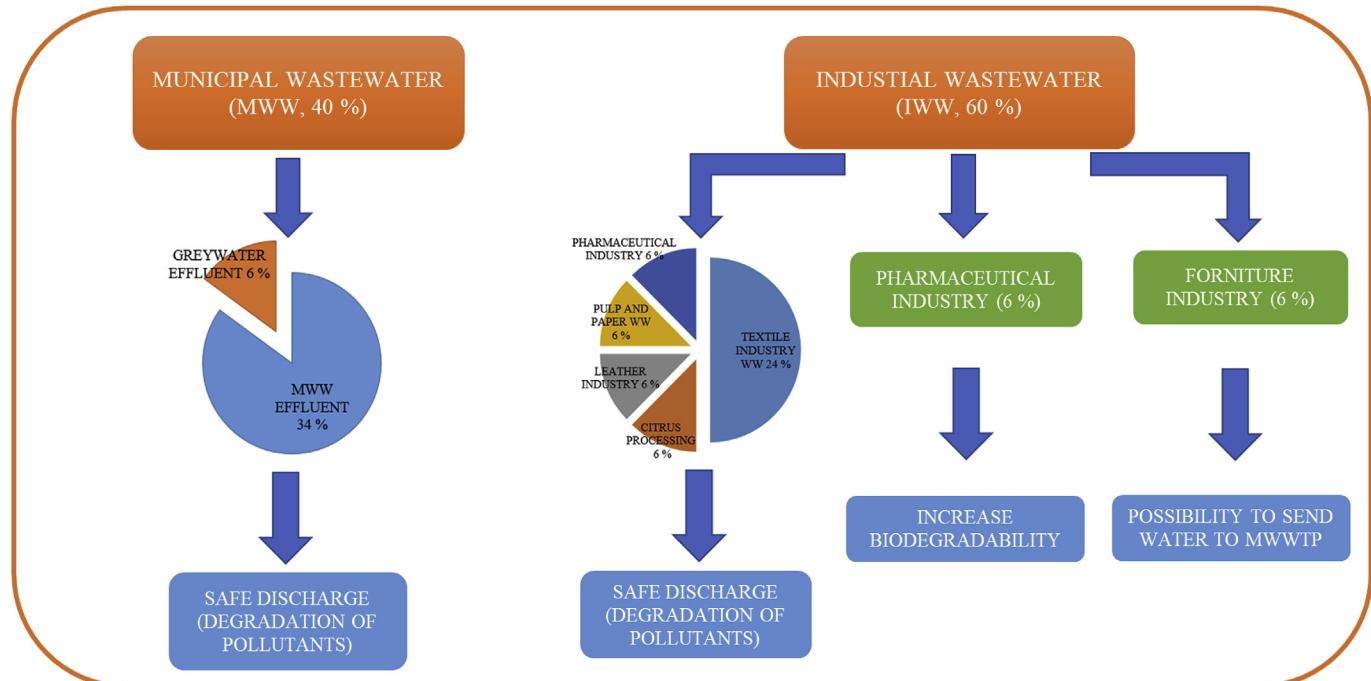


Fig. 2. Schematic presentation of types of wastewater used for detoxification by photocatalysis in last ten years.

in case of hybrid photocatalysis processes, requiring the addition of chemical agents such as H₂O₂, which is toxic for aquatic organisms. In case residual H₂O₂ concentrations after treatment are relatively high, the elimination of H₂O₂ will be required for the safe discharge or reuse of treated wastewater. For this purpose, filtration through granular activated carbon (GAC) can be successfully applied (Rueda-Márquez et al., 2015). Therefore, it would be interesting to check the toxicity of treated wastewater before and after filtration through GAC without the preliminary removal of H₂O₂ from water samples. Toxicity assessment is an important tool for the optimisation of photocatalytic wastewater treatment when complete mineralisation is not a goal. The results of toxicity assessment during the process can clearly indicate at which moment more toxic by-products are generated and when these are decomposed. Therefore, it can be suggested that the evaluation of toxicity on the course of photocatalytic wastewater treatment is of high significance and should be conducted especially if the practical application of photocatalysis is planned.

Toxicity tests applied for the photocatalytic detoxification of industrial wastewater were: *Daphnia magna*, *Daphnia similis*, *Artemia salina*, *Vibrio fischeri*, Ames test (*S.typhimurium*) and Kirby-Bauer method (zone inhibition using *E.coli*). In general, the toxicity of industrial wastewater is higher than that of MWW effluents. Therefore, all the tested bioassays were reported as an efficient tool for the toxicity assessment of industrial wastewaters.

In the reviewed articles devoted to photocatalytic wastewater detoxification, the following toxicity tests were applied for the assessment of MWW effluents and synthetic greywater during photocatalytic treatment: *Vibrio fischeri* bioluminescence's assay, *Daphnia magna* immobilisation test, *Pseudokirchneriella subcapitata*, *Anabaena flos-aquae*, *Brachionus calyciflorus*, estrogenic test (HELN ERα cell line), genotoxicity assessment (LS 174T cell line) and phytotoxicity test. The bioluminescence's assay with *Vibrio fischeri* was among most widely used toxicity tests for MWW effluents. Interestingly, the inhibition of *Vibrio fischeri* growth was reported for MWW effluents spiked with contaminants at environmentally relevant (ng L⁻¹ – µg L⁻¹) (Vela et al., 2018a, 2018b) and irrelevant concentrations (mg L⁻¹ – g L⁻¹) (Jallouli et al., 2018). However, in some cases, the very low sensitivity of *Vibrio fischeri* was observed even when MWW effluents spiked with the concentration of pollutants at the mg L⁻¹ level (Brienza et al., 2016; He et al., 2016). In spite of a large number of pollutants detected in not spiked MWW effluent, the EC₅₀ value for *Vibrio fischeri* of 80% was reported (Brienza et al., 2016), which is non-toxic according to (Calleja et al., 1986). Therefore, for the toxicity assessment of real MWW effluents, *Vibrio fischeri* bioluminescence's assay may not be very sensitive. It was shown that a toxicity assay with *P. subcapitata* is not very sensitive for MWW effluent (EC₅₀ 98%), while its sensitivity drastically increases when MWW effluents are spiked with pollutants at mg L⁻¹ level (Brienza et al., 2016; He et al., 2016). Similar behaviour was reported for *Daphnia magna* and *Brachionus calyciflorus* (Brienza et al., 2016). In spiked MWW effluent, the growth inhibition of *Anabaena flos-aquae* was reported to be approx. 70% and –20% (growth stimulation) before and after treatment, respectively (He et al., 2016). The growth stimulation was attributed to the presence of organic matter, which is the nutrition source for *Anabaena flos-aquae* as well as the decomposition of toxic contaminants (He et al., 2016). Therefore, the toxicity assay with *Anabaena flos-aquae* and other cyanobacteria may not be very representative for MWW due to relatively high organic load serving as a source of nutrition. The very high sensitivity of the estrogenic toxicity test was reported for not spiked MWW effluent, more specifically, estrogenic activity was detected in MWW effluent when it was not possible to detect any known estrogenic compound using sophisticated chemical analysis (liquid

chromatography - mass spectrometry) (Brienza et al., 2016). These results suggest that the estrogenic toxicity test is a very promising tool for MWW effluents. Genotoxicity (LS 174T cell line) of not spiked MWW effluent was not detected neither before no after photocatalytic treatment (Brienza et al., 2016). The phytotoxicity of synthetic greywater before and after hybrid photocatalytic process was tested using the seeds of *Sorghum saccharatum*, *Lepidium sativum*, *Sinapis alba* (Tsoumachidou et al., 2017). The *Sinapis alba* was the most sensitive among the tested plants. A phytotoxicity assay might be a valuable tool if MWW effluent is planned to be reused for the purpose of irrigation.

Photocatalytic ozonation was efficient for the detoxification of IWW as well as MWW effluents. Interestingly, in the majority of reviewed studies devoted to wastewater detoxification by photocatalytic ozonation, bioassays with freshwater invertebrate (*Daphnia*) were implemented. Other bioassays (*Vibrio fischeri*, *Pseudokirchneriella subcapitata*) as well as genotoxicity and cytotoxicity tests were also used. In general, photocatalytic ozonation was efficient for the decrease of wastewater toxicity and all the implemented bioassays were efficient. Tichonovas and co-authors assessed toxicity (*Daphnia magna*) of IWW during photocatalytic ozonation (Tichonovas et al., 2017). They reported a drastic increase of *Daphnia magna* mortality during the process followed by a significant decrease (reaching zero) at the end of the treatment. These results were explained by the higher acute toxicity of degradation by-products than parental pollutants.

Taking into account the possible practical application of photocatalytic wastewater treatment, a preliminary cost evaluation should be performed. For instance, the operational cost of the hybrid photocatalytic process was reported to be \$45.17 m⁻³ (Bansal et al., 2018). Energy consumption can also be very valuable information, based on which a cost estimation can be conducted. The photocatalytic ozonation is often considered to be expensive for wastewater treatment (Mehrjouei et al., 2015). In the reviewed articles, estimations of energy required for the detoxification of WW were suggested. Thus, photocatalytic ozonation was reported to be the most energy efficient treatment among those studied with the energy requirements 4.49–41.08 MJ/g-TOC (Tichonovas et al., 2017). Another study suggested that the required energy for photocatalytic ozonation varies from 7.3 to 22.0 kWh/m³ (Mecha et al., 2017).

4. Conclusions

In this work, the feasibility of photocatalysis for toxicity elimination from real wastewaters is critically discussed. Such aspect of photocatalysis detoxification of real wastewater as photocatalytic materials and its reactivation, types of wastewater and bioassays were discussed. Main outcomes of this work are as follows:

- While photocatalytic wastewater detoxification and purification shows potential, most works (~70%) considered in the scope of this review were conducted on the laboratory scale.
- Most studied photocatalytic materials for real wastewater detoxification both in form of powder and thin films are TiO₂ and ZnO.
- Studies devoted to separation and/or recovery and reuse of photocatalytic materials used for real wastewater detoxification are lacking.
- Only few studies were conducted on real wastewater detoxification using photocatalysts in a form of thin film. There is lack of information on behaviour of thin films (detachment of photocatalyst, photodissolution, etc.) during photocatalytic detoxification of real wastewater.

- The evaluation of the photocatalytic treatment costs for real wastewater detoxification by photocatalysis is not always available.
- Based on this revised literature, it can be suggested that standard tests with species such as *Daphnia magna*, *Vibrio fishceri*, *Pseudokirchneriella subcapitata* and *Brachionus calyciflorus* might not be sensitive enough when detoxification of municipal wastewater is studied.
- In some cases, toxicity assessment may be even more sensitive than chemical analysis. It is expected that future studies devoted to the detoxification of wastewater by photocatalysis will implement batteries of bioassays (including biosensors) for a more comprehensive evaluation of water toxicity.
- The use of TiO₂ and other photocatalysts for real wastewater treatment has not been investigated as deep as with other AOPs due to the clear reasons, i.e. efficiency of the process strongly decreases in presence of complex mixture of organic pollutants and high levels of DOC, etc. It can be expected that future studies devoted to development of nanomaterials for similar applications might consider issues related to real wastewater matrix.
- The existing gap between materials research and application studies for real wastewater is an actual barrier, which limits further development of application of photocatalysis for real wastewater treatment.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgments

Authors would like to express sincere gratitude to Professor Manuel Manzano (University of Cadiz) for fruitful discussions and valuable advices during preparation of this review. D.Sc. Juan Jose Rueda-Marquez is thankful for financial support from Academy of Finland within the project "Combination of Advanced Oxidation Processes and Photobiotreatment for Sustainable Resource Recovery and Wastewater Reuse" (No. 322339, 2019–2022). D.Sc. Pilar Fernández Ibáñez acknowledges the financial support of the Global Challenges Research Fund (GCRF) UK Research and Innovation (SAFEWATER; EPSRC Grant Reference EP/P032427/1).

References

- Ahamed, M., Akhtar, M.J., Alhadlaq, H.A., 2019. Preventive effect of TiO₂ nanoparticles on heavy metal Pb-induced toxicity in human lung epithelial (A549) cells. *Toxicol. Vitro* 18–27.
- Ahmed, S., Ollis, D.F., 1984. Solar photoassisted catalytic decomposition of the chlorinated hydrocarbons trichloroethylene and trichloromethane. *Sol. Energy* 5, 597–601.
- Al-Sayed, G., D'Oliveira, J., Pichat, P., 1991. Semiconductor-sensitized photodegradation of 4-chlorophenol in water. *J. Photochem. Photobiol. Chem.* 1, 99–114.
- Apria Systems, S.L., 2018. Advanced Oxidation Equipment through UV Photocatalysis for R&D Activities.
- Arcanjo, G.S., Mounteer, A.H., Bellato, C.R., Silva, L.M.M.d., Brant Dias, S.H., Silva, P.R.d., 2018. Heterogeneous photocatalysis using TiO₂ modified with hydrotalcite and iron oxide under UV-visible irradiation for color and toxicity reduction in secondary textile mill effluent. *J. Environ. Manag.* 154–163.
- Bansal, P., Verma, A., Talwar, S., 2018. Detoxification of real pharmaceutical wastewater by integrating photocatalysis and photo-Fenton in fixed-mode. *Chem. Eng. J.* 838–848.
- Barbeni, M., Morello, M., Pramauro, E., Pelizzetti, E., Vincenti, M., Borgarello, E., Serpone, N., 1987. Sunlight photodegradation of 2,4,5-trichlorophenoxy-acetic acid and 2,4,5-trichlorophenol on TiO₂. Identification of intermediates and degradation pathway. *Chemosphere* 6, 1165–1179.
- Barndók, H., Hermosilla, D., Han, C., Dionysiou, D.D., Negro, C., Blanco, A., 2016. Degradation of 1,4-dioxane from industrial wastewater by solar photocatalysis using immobilized NF-TiO₂ composite with monodisperse TiO₂ nanoparticles. *Appl. Catal. B Environ.* 44–52.
- Belgiorno, V., Rizzo, L., Fatta, D., Della Rocca, C., Lofrano, G., Nikolaou, A., Naddeo, V., Meric, S., 2007. Review on endocrine disrupting-emerging compounds in urban wastewater: occurrence and removal by photocatalysis and ultrasonic irradiation for wastewater reuse. *Desalination* 1, 166–176.
- Berberidou, C., Kitsiou, V., Lambropoulou, D.A., Antoniadis, A., Ntonou, E., Zalidis, G.C., Poulios, I., 2017. Evaluation of an alternative method for wastewater treatment containing pesticides using solar photocatalytic oxidation and constructed wetlands. *J. Environ. Manag.* 133–139.
- Biancullo, F., Moreira, N.F.F., Ribeiro, A.R., Manaia, C.M., Faria, J.L., Nunes, O.C., Castro-Silva, S.M., Silva, A.M.T., 2019. Heterogeneous photocatalysis using UVA-LEDs for the removal of antibiotics and antibiotic resistant bacteria from urban wastewater treatment plant effluents. *Chem. Eng. J.* 304–313.
- Bideau, M., Claudel, B., Dubien, C., Faure, L., Kazouan, H., 1995. On the "immobilization" of titanium dioxide in the photocatalytic oxidation of spent waters. *J. Photochem. Photobiol. A* 2, 137–144.
- Biglari, H., Afsharnia, M., Alipour, V., Khosravi, R., Sharifi, K., Mahvi, A.H., 2017. A review and investigation of the effect of nanophotocatalytic ozonation process for phenolic compound removal from real effluent of pulp and paper industry. *Environ. Sci. Pollut. Control Ser. A*, 4, 4105–4116.
- Blaise, C., Gagné, F., Férid, J.F., Eullaffroy, P., 2008. Ecotoxicity of selected nanomaterials to aquatic organisms. *Environ. Toxicol.* 5, 591–598.
- Blanco-Galvez, J., Fernández-Ibáñez, P., Malato-Rodríguez, S., 2006. Solar photocatalytic detoxification and disinfection of water: recent overview. *J. Sol. Energy Eng.* 4–15.
- Booshehri, A.Y., Polo-Lopez, M.I., Castro-Alférez, M., He, P., Xu, R., Rong, W., Malato, S., Fernández-Ibáñez, P., 2017. Assessment of solar photocatalysis using Ag/BiVO₄ at pilot solar Compound Parabolic Collector for inactivation of pathogens in well water and secondary effluents. *Catal. Today* 124–134.
- Bouhadoun, S., Guillard, C., Dapozze, F., Singh, S., Amans, D., Bouclé, J., Herlin-Boime, N., 2015. One step synthesis of N-doped and Au-loaded TiO₂ nanoparticles by laser pyrolysis: application in photocatalysis. *Appl. Catal. B Environ.* 367–375.
- Boxall, A.B., Tiede, K., Chaudhry, Q., 2007. Engineered Nanomaterials in Soils and Water: How Do They Behave and Could They Pose a Risk to Human Health?.
- Boyle, D., Goss, G.G., 2018. Effects of silver nanoparticles in early life-stage zebrafish are associated with particle dissolution and the toxicity of soluble silver. *NanoImpact* 1–8.
- Brienza, M., Mahdi Ahmed, M., Escande, A., Plantard, G., Scrano, L., Chiron, S., Bufo, S.A., Goetz, V., 2016. Use of solar advanced oxidation processes for wastewater treatment: follow-up on degradation products, acute toxicity, genotoxicity and estrogenicity. *Chemosphere* 473–480.
- Brunner, T.J., Wick, P., Manser, P., Spohn, P., Gras, R.N., Limbach, L.K., Bruinink, A., Stark, W.J., 2006. In vitro cytotoxicity of oxide nanoparticles: comparison to asbestos, silica, and the effect of particle solubility. *Environ. Sci. Technol.* 14, 4374–4381.
- Bundschuh, M., Filser, J., Lüderwald, S., McKee, M.S., Metreveli, G., Schaumann, G.E., Schulz, R., Wagner, S., 2018. Nanoparticles in the environment: where do we come from, where do we go to? *Environ. Sci. Eur.* 1, 1–17.
- Calleja, A., Baldasano, J., Mulet, A., 1986. Toxicity analysis of leachates from hazardous wastes via Microtox and *Daphnia magna*. *Environ. Toxicol.* 1, 73–83.
- Canesi, L., Ciacci, C., Balbi, T., 2015. Interactive effects of nanoparticles with other contaminants in aquatic organisms: friend or foe? *Mar. Environ. Res.* 128–134.
- Carp, O., Huisman, C.L., Reller, A., 2004. Photoinduced reactivity of titanium dioxide. *Prog. Solid State Chem.* 1–2, 33–177.
- Chong, M.N., Jin, B., Chow, C.W.K., Saint, C., 2010. Recent developments in photocatalytic water treatment technology: a review. *Water Res.* 10, 2997–3027.
- Çifçi, D.I., Meriç, S., 2015. Optimization of suspended photocatalytic treatment of two biologically treated textile effluents using TiO₂ and ZnO catalysts. *Global NEST Journal* 17 (4), 653–663.
- De La Torre Roche, R., Pagano, L., Majumdar, S., Eitzer, B.D., Zuverza-Mena, N., Ma, C., Servin, A.D., Marmiroli, N., Dhanher, O.P., White, J.C., 2018. Co-exposure of imidacloprid and nanoparticle Ag or CeO₂ to *Cucurbita pepo* (zucchini): contaminant bioaccumulation and translocation. *NanoImpact* 136–145.
- Doll, T.E., Frimmel, F.H., 2005. Cross-flow microfiltration with periodical backwashing for photocatalytic degradation of pharmaceutical and diagnostic residues—evaluation of the long-term stability of the photocatalytic activity of TiO₂. *Water Res.* 5, 847–854.
- Du, J., Tang, J., Xu, S., Ge, J., Dong, Y., Li, H., Jin, M., 2018. A review on silver nanoparticles-induced ecotoxicity and the underlying toxicity mechanisms. *Regul. Toxicol. Pharmacol.* 231–239.
- Fan, X., Wang, P., Wang, C., Hu, B., Wang, X., 2017. Lead accumulation (adsorption and absorption) by the freshwater bivalve *Corbicula fluminea* in sediments contaminated by TiO₂ nanoparticles. *Environ. Pollut.* 712–721.
- Fenoll, J., Garrido, I., Flores, P., Hellín, P., Vela, N., Navarro, G., García-García, J., Navarro, S., 2019. Implementation of a new modular facility to detoxify agro-wastewater polluted with neonicotinoid insecticides in farms by solar photocatalysis. *Energy* 722–729.
- Fernández-Ibáñez, P., Blanco, J., Malato, S., de las Nieves, F.J., 2003. Application of the colloidal stability of TiO₂ particles for recovery and reuse in solar photocatalysis. *Water Res.* 13, 3180–3188.
- François, G., Mélanie, D., Marlène, F., Michel, F., 2015. Effects of a municipal effluent on the freshwater mussel *Elliptio complanata* following challenge with *Vibrio anguillarum*. *J. Environ. Sci.* 91–99.
- Franklin, N.M., Rogers, N.J., Apte, S.C., Batley, G.E., Gadd, G.E., Casey, P.S., 2007.

- Comparative toxicity of nanoparticulate ZnO, bulk ZnO, and ZnCl₂ to a freshwater microalga (*Pseudokirchneriella subcapitata*): the importance of particle solubility.** Environ. Sci. Technol. 24, 8484–8490.
- Ganiyu, S.O., van Hullebusch, E.D., Cretin, M., Esposito, G., Oturan, M.A., 2015. Coupling of membrane filtration and advanced oxidation processes for removal of pharmaceutical residues: a critical review. Separ. Purif. Technol. 891–914.
- Gholami, N., Ghasemi, B., Anvariour, B., Jorf, S., 2018. Enhanced photocatalytic degradation of furfural and a real wastewater using UVC/TiO₂ nanoparticles immobilized on white concrete in a fixed-bed reactor. J. Ind. Eng. Chem. 291–301.
- Gracia-Lor, E., Sancho, J.V., Serrano, R., Hernández, F., 2012. Occurrence and removal of pharmaceuticals in wastewater treatment plants at the Spanish Mediterranean area of Valencia. Chemosphere 5, 453–462.
- Hartmann, N.B., Baun, A., 2010. The nano cocktail: ecotoxicological effects of engineered nanoparticles in chemical mixtures. Integrated Environ. Assess. Manag.: Int. J. 2, 311–313.
- Hartmann, N.B., Legros, S., Von der Kammer, F., Hofmann, T., Baun, A., 2012. The potential of TiO₂ nanoparticles as carriers for cadmium uptake in *Lumbriculus variegatus* and *Daphnia magna*. Aquat. Toxicol. 1–8.
- Hasegawa, M.C., Feijó de Souza Daniel, J., Takashima, K., Batista, G.A., da Silva, S.M., 2014. COD removal and toxicity decrease from tannery wastewater by zinc oxide-assisted photocatalysis: a case study. Environ. Technol. 13, 1589–1595.
- He, Y., Sutton, N.B., Rijnarts, H.H., Langenhoff, A.A.M., 2016. Degradation of pharmaceuticals in wastewater using immobilized TiO₂ photocatalysis under simulated solar irradiation. Appl. Catal. B Environ. 132–141.
- Herrmann, J., 1999. Heterogeneous photocatalysis: fundamentals and applications to the removal of various types of aqueous pollutants. Catal. Today 1, 115–129.
- Hidaka, H., Kubota, H., Graetzel, M., Pelizzetti, E., Serpone, N., 1986. Photo-degradation of surfactants II: degradation of sodium dodecylbenzene sulphonate catalysed by titanium dioxide particles. J. Photochem. 2, 219–230.
- Huang, H., Li, W., 2011. Destruction of toluene by ozone-enhanced photocatalysis: performance and mechanism. Appl. Catal. B Environ. 3–4, 449–453.
- Iglesias, O., Rivero, M.J., Urtiaga, A.M., Ortiz, I., 2016. Membrane-based photocatalytic systems for process intensification. Chem. Eng. J. 136–148.
- Iwase, M., Yamada, K., Kurisaki, T., Prieto-Mahaney, O.O., Ohtani, B., Wakita, H., 2013. Visible-light photocatalysis with phosphorus-doped titanium(IV) oxide particles prepared using a phosphide compound. Appl. Catal. B Environ. 39–44.
- Jallouli, N., Pastrana-Martínez, L.M., Ribeiro, A.R., Moreira, N.F.F., Faria, J.L., Hentati, O., Silva, A.M.T., Ksibi, M., 2018. Heterogeneous photocatalytic degradation of ibuprofen in ultrapure water, municipal and pharmaceutical industry wastewaters using a TiO₂/UV-LED system. Chem. Eng. J. 976–984.
- Kabra, K., Chaudhary, R., Sawhney, R.L., 2004. Treatment of hazardous organic and inorganic compounds through aqueous-phase photocatalysis: a review. Ind. Eng. Chem. Res. 24, 7683–7696.
- Kagaya, S., Shimizu, K., Arai, R., Hasegawa, K., 1999. Separation of titanium dioxide photocatalyst in its aqueous suspensions by coagulation with basic aluminium chloride. Water Res. 7, 1753–1755.
- Kahru, A., Dubourguier, H., 2010. From ecotoxicology to nanoecotoxicology. Toxicology 2, 105–119.
- Käkinen, A., Kahru, A., Nurmsoo, H., Kubo, A., Bondarenko, O.M., 2016. Solubility-driven toxicity of CuO nanoparticles to Caco2 cells and Escherichia coli: effect of sonication energy and test environment. Toxicol. Vitro 172–179.
- Karaolía, P., Michael-Kordatou, I., Hapeshi, E., Drosou, C., Bertakos, Y., Christofilos, D., Armatas, G.S., Sygelou, L., Schwartz, T., Xekoukoulis, N.P., Fattakassinos, D., 2018. Removal of antibiotics, antibiotic-resistant bacteria and their associated genes by graphene-based TiO₂ composite photocatalysts under solar radiation in urban wastewaters. Appl. Catal. B Environ. 810–824.
- Klitzke, S., Metreveli, G., Peters, A., Schaumann, G.E., Lang, F., 2015. The fate of silver nanoparticles in soil solution—sorption of solutes and aggregation. Sci. Total Environ. 54–60.
- Kudo, A., Miseki, Y., 2009. Heterogeneous photocatalyst materials for water splitting. Chem. Soc. Rev. 1, 253–278.
- Lara-Martín, P.A., González-Mazo, E., Petrovic, M., Barceló, D., Brownawell, B.J., 2014. Occurrence, distribution and partitioning of nonionic surfactants and pharmaceuticals in the urbanized Long Island Sound Estuary (NY). Mar. Pollut. Bull. 2, 710–719.
- Lee, S., Kim, S., Choi, J., 2009. Genotoxicity and ecotoxicity assays using the freshwater crustacean *Daphnia magna* and the larva of the aquatic midge *Chironomus riparius* to screen the ecological risks of nanoparticle exposure. Environ. Toxicol. Pharmacol. 1, 86–91.
- Levchuk, I., Rueda-Márquez, J.J., Suihikonen, S., Manzano, M.A., Sillanpää, M., 2015. Application of UVA-LED based photocatalysis for plywood mill wastewater treatment. Separ. Purif. Technol. 1–5.
- Levchuk, I., Guillard, C., Dappozze, F., Parola, S., Leonard, D., Sillanpää, M., 2016a. Photocatalytic activity of TiO₂ films immobilized on aluminum foam by atomic layer deposition technique. J. Photochem. Photobiol. Chem. 16–23.
- Levchuk, I., Sillanpää, M., Guillard, C., Gregori, D., Chateau, D., Chaput, F., Lerouge, F., Parola, S., 2016b. Enhanced photocatalytic activity through insertion of plasmonic nanostructures into porous TiO₂/SiO₂ hybrid composite films. J. Catal. 117–124.
- Li, Y., Jiao, Z., Yang, N., Gao, H., 2009. Regeneration of nano-ZnO photocatalyst by the means of soft-mechanochemical ion exchange method. J. Environ. Sci. S69–S72.
- Li, X., He, J., 2013. Synthesis of raspberry-like SiO₂-TiO₂ nanoparticles toward antireflective and self-cleaning coatings. ACS Appl. Mater. Interfaces 11, 5282–5290.
- Lima, C.S., Batista, K.A., García Rodríguez, A., Souza, J.R., Fernandes, K.F., 2015. Photodecomposition and color removal of a real sample of textile wastewater using heterogeneous photocatalysis with polypyrrole. Sol. Energy 105–113.
- Ma, J., Chen, Y., Nie, J., Ma, L., Huang, Y., Li, L., Liu, Y., Guo, Z., 2018. Pilot-scale study on catalytic ozonation of bio-treated dyeing and finishing wastewater using recycled waste iron shavings as a catalyst. Sci. Rep. 1, 7555.
- Malchi, T., Maor, Y., Tadmor, G., Shenker, M., Cheftz, B., 2014. Irrigation of root vegetables with treated wastewater: evaluating uptake of pharmaceuticals and the associated human health risks. Environ. Sci. Technol. 16, 9325–9333.
- Martín-de-Lucía, I., Gonçalves, S.F., Leganés, F., Fernández-Piñas, F., Rosal, R., Loureiro, S., 2019. Combined toxicity of graphite-diamond nanoparticles and thiabendazole to *Daphnia magna*. Sci. Total Environ. 1145–1154.
- Mecha, A.C., Onyango, M.S., Ochieng, A., Momba, M.N., 2017. Ultraviolet and solar photocatalytic ozonation of municipal wastewater: catalyst reuse, energy requirements and toxicity assessment. Chemosphere 669–676.
- Mehrjouei, M., Müller, S., Möller, D., 2015. A review on photocatalytic ozonation used for the treatment of water and wastewater. Chem. Eng. J. 209–219.
- Menard, A., Drobne, D., Jemec, A., 2011. Ecotoxicity of nanosized TiO₂. Review of in vivo data. Environ. Pollut. 3, 677–684.
- Metreveli, G., Philippe, A., Schaumann, G.E., 2015. Disaggregation of silver nanoparticle homoaggregates in a river water matrix. Sci. Total Environ. 35–44.
- Mills, A., Le Hunte, S., 1997. An overview of semiconductor photocatalysis. J. Photochem. Photobiol. A, 1, 1–35.
- Miralles-Cuevas, S., Audino, F., Oller, I., Sánchez-Moreno, R., Sánchez Pérez, J.A., Malato, S., 2014. Pharmaceuticals removal from natural water by nanofiltration combined with advanced tertiary treatments (solar photo-Fenton, photo-Fenton-like Fe(III)-EDDS complex and ozonation). Separ. Purif. Technol. 515–522.
- Miranda-García, N., Suárez, S., Maldonado, M.I., Malato, S., Sánchez, B., 2014. Regeneration approaches for TiO₂ immobilized photocatalyst used in the elimination of emerging contaminants in water. Catal. Today 27–34, 0.
- Morawski, A.W., Kusiak-Nejman, E., Wanag, A., Kapica-Kozar, J., Wróbel, R.J., Ohtani, B., Aksienionek, M., Lipińska, L., 2017. Photocatalytic degradation of acetic acid in the presence of visible light-active TiO₂-reduced graphene oxide photocatalysts. Catal. Today 108–113.
- Moreira, N.F.F., Narciso-da-Rocha, C., Polo-López, M.I., Pastrana-Martínez, L.M., Faria, J.L., Manaa, C.M., Fernández-Ibáñez, P., Nunes, O.C., Silva, A.M.T., 2018. Solar treatment (H₂O₂, TiO₂-P25 and GO-TiO₂ photocatalysis, photo-Fenton) of organic micropollutants, human pathogen indicators, antibiotic resistant bacteria and related genes in urban wastewater. Water Res. 195–206.
- Moreira, N.F.F., Sampaio, M.J., Ribeiro, A.R., Silva, C.G., Faria, J.L., Silva, A.M.T., 2019. Metal-free g-C₃N₄ photocatalysis of organic micropollutants in urban wastewater under visible light. Appl. Catal. B Environ. 184–192.
- Nogueira, V., Lopes, I., Rocha-Santos, T., Gonçalves, F., Pereira, R., 2017. Treatment of real industrial wastewaters through nano-TiO₂ and nano-Fe₂O₃ photocatalysis: case study of mining and kraft pulp mill effluents. Environ. Technol. 1–11.
- Nogueira, V., Lopes, I., Rocha-Santos, T., Gonçalves, F., Pereira, R., 2015. Toxicity of solid residues resulting from wastewater treatment with nanomaterials. Aquat. Toxicol. 172–178.
- Ohtani, B., 2011. Photocatalysis by inorganic solid materials: revisiting its definition, concepts, and experimental procedures. Adv. Inorg. Chem. 395–430.
- Ohtani, B., 2013. Titania photocatalysis beyond recombination: a critical review. Catalysts 4, 942–953.
- Ohtani, B., 2010. Photocatalysis A to Z—what we know and what we do not know in a scientific sense. J. Photochem. Photobiol. C Photochem. Rev. 4, 157–178.
- Oller, I., Malato, S., Sánchez-Pérez, J.A., 2011. Combination of Advanced Oxidation Processes and biological treatments for wastewater decontamination—a review. Sci. Total Environ. 20, 4141–4166.
- Ollis, D.F., 2000. Photocatalytic purification and remediation of contaminated air and water. Comptes Rendus Acad. Sci. - Ser. IIC Chem. 6, 405–411.
- Pan, X., Zhang, N., Fu, X., Xu, Y., 2013. Selective oxidation of benzyl alcohol over TiO₂ nanosheets with exposed {001} facets: catalyst deactivation and regeneration. Appl. Catal. Gen. 181–187.
- Patchaiyappan, A., Saran, S., Devipriya, S.P., 2016. Recovery and reuse of TiO₂ photocatalyst from aqueous suspension using plant based coagulant - a green approach. Kor. J. Chem. Eng. 7, 2107–2113.
- Pintado-Herrera, M.G., González-Mazo, E., Lara-Martin, P.A., 2014. Atmospheric pressure gas chromatography-time-of-flight-mass spectrometry (APGC-ToF-MS) for the determination of regulated and emerging contaminants in aqueous samples after stir bar sorptive extraction (SBSE). Anal. Chim. Acta 1–13.
- Qi, K., Cheng, B., Yu, J., Ho, W., 2017. Review on the improvement of the photocatalytic and antibacterial activities of ZnO. J. Alloys Compd. 792–820.
- Quinn, B., Gagné, F., Blaise, C., 2009. Evaluation of the acute, chronic and teratogenic effects of a mixture of eleven pharmaceuticals on the cnidarian, *Hydra attenuata*. Sci. Total Environ. 3, 1072–1079.
- Quinn, B., Schmidt, W., O'Rourke, K., Hernan, R., 2011. Effects of the pharmaceuticals gemfibrozil and diclofenac on biomarker expression in the zebra mussel (*Dreissena polymorpha*) and their comparison with standardised toxicity tests. Chemosphere 5, 657–663.
- Rao, T.N., Tryk, D.A., Fujishima, A., 2003. Applications of TiO₂ Photocatalysis. Encyclopedia of Electrochemistry.
- Ratova, M., Tosheva, L., Kelly, P.J., Ohtani, B., 2019. Characterisation and properties of visible light-active bismuth oxide-titania composite photocatalysts. Sustain. Mater. Technol., e00112
- Rosman, N., Salleh, W.N.W., Ismail, A.F., Jaafar, J., Harun, Z., Aziz, F., Mohamed, M.A., Ohtani, B., Takashima, M., 2018. Photocatalytic degradation of phenol over

- visible light active ZnO/Ag₂CO₃/Ag₂O nanocomposites heterojunction. *J. Photochem. Photobiol. Chem.* 602–612.
- Rueda-Márquez, J.J., Pintado-Herrera, M.G., Martín-Díaz, M.L., Acevedo-Merino, A., Manzano, M.A., 2015. Combined AOPs for potential wastewater reuse or safe discharge based on multi-barrier treatment (microfiltration-H₂O₂/UV-catalytic wet peroxide oxidation). *Chem. Eng. J.* 80–90, 0.
- Sano, T., Puzenat, E., Guillard, C., Geantet, C., Matsuzawa, S., 2008. Degradation of C₂H₂ with modified-TiO₂ photocatalysts under visible light irradiation. *J. Mol. Catal. Chem.* 1, 127–133.
- Santiago-Morales, J., Gómez, M.J., Herrera, S., Fernández-Alba, A.R., García-Calvo, E., Rosal, R., 2012. Oxidative and photochemical processes for the removal of galaxolide and tonalide from wastewater. *Water Res.* 14, 4435–4447.
- Sauer, M.L., Ollis, D.F., 1996. Catalyst deactivation in gas–solid photocatalysis. *J. Catal.* 1, 215–217.
- Saverini, M., Catanzaro, I., Sciandrello, G., Avellone, G., Indelicato, S., Marci, G., Palmisano, L., 2012. Genotoxicity of citrus wastewater in prokaryotic and eukaryotic cells and efficiency of heterogeneous photocatalysis by TiO₂. *J. Photochem. Photobiol. B Biol.* 8–15.
- Shan, A.Y., Ghazi, T.I.M., Rashid, S.A., 2010. Immobilisation of titanium dioxide onto supporting materials in heterogeneous photocatalysis: a review. *Appl. Catal. Gen.* 1–2, 1–8.
- Sordo, C., Van Grieken, R., Marugan, J., Fernández-Ibáñez, P., 2010. Solar photocatalytic disinfection with immobilised TiO₂ at pilot-plant scale. *Water Sci. Technol.* 2, 507–512.
- Souza, R.P., Freitas, T.K.F.S., Domingues, F.S., Pezoti, O., Ambrosio, E., Ferrari-Lima, A.M., Garcia, J.C., 2016. Photocatalytic activity of TiO₂, ZnO and Nb₂O₅ applied to degradation of textile wastewater. *J. Photochem. Photobiol. Chem.* 9–17.
- Spasiano, D., Marotta, R., Malato, S., Fernandez-Ibáñez, P., Di Somma, I., 2015. Solar photocatalysis: materials, reactors, some commercial, and pre-industrialized applications. A comprehensive approach. *Appl. Catal. B Environ.* 90–123.
- Sun, R., Nakajima, A., Watanabe, T., Hashimoto, K., 2003. Decomposition of gas-phase octamethyltrisiloxane on TiO₂ thin film photocatalysts—catalytic activity, deactivation, and regeneration. *J. Photochem. Photobiol. A* 2, 203–209.
- Talwar, S., Sangal, V.K., Verma, A., 2018. Feasibility of using combined TiO₂ photocatalysis and RBC process for the treatment of real pharmaceutical wastewater. *J. Photochem. Photobiol. Chem.* 263–270.
- Therurujirapapong, T., Khanitchaidecha, W., Nakaruk, A., 2017. Treatment of high organic carbon industrial wastewater using photocatalysis process. *Environ. Nanotechnol. Monit. Manag.* 163–168.
- Tichonovas, M., Krugly, E., Grybauskas, A., Jankūnaitė, D., Račys, V., Martuzevičius, D., 2017. Advanced oxidation-based treatment of furniture industry wastewater. *Environ. Technol.* 1–8.
- Tso, C., Zhung, C., Shih, Y., Tseng, Y., Wu, S., Doong, R., 2010. Stability of metal oxide nanoparticles in aqueous solutions. *Water Sci. Technol.* 1, 127–133.
- Tsoumachidou, S., Velegraki, T., Antoniadis, A., Poulios, I., 2017. Greywater as a sustainable water source: a photocatalytic treatment technology under artificial and solar illumination. *J. Environ. Manag.* 232–241.
- Turan, N.B., Erkan, H.S., Engin, G.O., Bilgili, M.S., 2019. Nanoparticles in the aquatic environment: usage, properties, transformation and toxicity—a review. *Process Saf. Environ. Protect.* 238–249.
- United Nations, 2018. Minamata Convention on Mercury.
- Vaiano, V., Iervolino, G., 2018. Facile method to immobilize ZnO particles on glass spheres for the photocatalytic treatment of tannery wastewater. *J. Colloid Interface Sci.* 192–199.
- Vela, N., Calín, M., Yáñez-Gascón, M.J., Garrido, I., Pérez-Lucas, G., Fenoll, J., Navarro, S., 2018a. Photocatalytic oxidation of six endocrine disruptor chemicals in wastewater using ZnO at pilot plant scale under natural sunlight. *Environ. Sci. Pollut. Control Ser.* 35 (25), 34995–35007.
- Vela, N., Calín, M., Yáñez-Gascón, M.J., Garrido, I., Pérez-Lucas, G., Fenoll, J., Navarro, S., 2018b. Photocatalytic oxidation of six pesticides listed as endocrine disruptor chemicals from wastewater using two different TiO₂ samples at pilot plant scale under sunlight irradiation. *J. Photochem. Photobiol. Chem.* 271–278.
- Vevers, W.F., Jha, A.N., 2008. Genotoxic and cytotoxic potential of titanium dioxide (TiO₂) nanoparticles on fish cells in vitro. *Ecotoxicology* 5, 410–420.
- Vilhunen, S., Puton, J., Virkutyte, J., Sillanpää, M., 2011. Efficiency of hydroxyl radical formation and phenol decomposition using UV light emitting diodes and H₂O₂. *Environ. Technol.* 865–872.
- Wang, H., Wick, R.L., Xing, B., 2009. Toxicity of nanoparticulate and bulk ZnO, Al₂O₃ and TiO₂ to the nematode Caenorhabditis elegans. *Environ. Pollut.* 4, 1171–1177.
- Wang, Y., Zhang, X., Liu, J., Wang, Y., Duan, D., Fan, C., 2015. Facile regeneration and photocatalytic activity of CuO-modified silver bromide photocatalyst. *Mater. Sci. Semicond. Process.* 613–620.
- Wu, J., Ma, L., Chen, Y., Cheng, Y., Liu, Y., Zha, X., 2016. Catalytic ozonation of organic pollutants from bio-treated dyeing and finishing wastewater using recycled waste iron shavings as a catalyst: removal and pathways. *Water Res.* 140–148.
- Zhao, Y., Zhong, J., Li, H., Xu, N., Shi, J., 2002. Fouling and regeneration of ceramic microfiltration membranes in processing acid wastewater containing fine TiO₂ particles. *J. Membr. Sci.* 1, 331–341.
- Zhuang, H., Han, H., Hou, B., Jia, S., Zhao, Q., 2014. Heterogeneous catalytic ozonation of biologically pretreated Lurgi coal gasification wastewater using sewage sludge based activated carbon supported manganese and ferric oxides as catalysts. *Bioresour. Technol.* 178–186.