
This is an electronic reprint of the original article.
This reprint may differ from the original in pagination and typographic detail.

Kiuru, Risto; Kantia, Pekka; Rinne, Mikael

Searching for Indicators of Excavation Damage Using R Statistics Environment

Published in:
EUROCK 2018: Geomechanics and Geodynamics of Rock Masses

Published: 22/05/2018

Document Version
Peer-reviewed accepted author manuscript, also known as Final accepted manuscript or Post-print

Please cite the original version:
Kiuru, R., Kantia, P., & Rinne, M. (2018). Searching for Indicators of Excavation Damage Using R Statistics Environment. In V. Litvinenko (Ed.), *EUROCK 2018: Geomechanics and Geodynamics of Rock Masses : Proceedings of the 2018 European Rock Mechanics Symposium (Eurock 2018), Saint Petersburg, Russia, 22-26 May 2018* (Vol. 2, pp. 1223-1228). Taylor & Francis.

This material is protected by copyright and other intellectual property rights, and duplication or sale of all or part of any of the repository collections is not permitted, except that material may be duplicated by you for your research use or educational purposes in electronic or print form. You must obtain permission for any other use. Electronic or print copies may not be offered, whether for sale or otherwise to anyone who is not an authorised user.

This is an Accepted Manuscript of a book chapter published by Routledge/CRC Press in
Geomechanics and Geodynamics of Rock Masses, Volume 2 on 14 May 2018, available online:
<https://www.taylorfrancis.com/books/e/9780429461767>

Searching for Indicators of Excavation Damage Using R Statistics Environment

M.Sc. Risto Kiuru

Doctoral Student

Aalto University School of Engineering, Department of Civil Engineering

P.O. Box 12100, Rakentajanaukio 4 A, FI-00760 Espoo, Finland

+358 10 33 493 49

risto.kiuru@aalto.fi

M.Sc. Pekka Kantia

Managing Director

Geofcon

Kansankatu 13 A 8, FI-96100 Rovaniemi, Finland

+358 40 53 99 727

pekka.kantia@geofcon.com

Dr. Mikael Rinne

Associate Professor

Aalto University School of Engineering, Department of Civil Engineering

P.O. Box 12100, Rakentajanaukio 4 A, FI-00760 Espoo, Finland

+358 50 572 6090

mikael.rinne@aalto.fi

Abstract

Understanding the formation and physical characteristics of excavation damage of rock mass is critical for the long-term safety evaluation of deep geological disposal of spent nuclear fuel. In order to develop methods for identifying Excavation Damaged Zone (EDZ), physical and mechanical properties of 132 rock specimens were measured. All together 32 physical properties were measured, of which P- and S-wave velocity in three orthogonal directions and under six levels of axial loading. Derived properties were then calculated from the measured ones, leading to a total of 277 different properties, when accounting for measurement direction and level of axial loading. Considering that not all properties were measured from all specimens, this led to approximately 30 000 combinations of physical properties to shift through. Using R as a tool for the statistical analysis allowed the treatment of the entire dataset in reasonable time, thus providing a screening of existing correlations between different properties of the rock specimens. Furthermore, detailed interpretation could then be focused only on associations of statistical significance, whether or not this was apparent from the data. Best indicators for excavation damage based on this study appear to be electrical resistivity, S-wave velocity, shear impedance, shear modulus and Young's modulus.

Keywords

Excavation damage, petrophysics, rock strength, dynamic elastic parameters, static elastic parameters, laboratory testing, statistical analysis, R

Introduction

The main goal of the study was to identify anomalous physical properties linked to either increased porosity or abnormally low mechanical strength, indicative of excavation induced damage or natural defects in the rock mass. The secondary goal was to find associations between dynamic and static elastic properties, or static elastic properties and other physical properties. A site-specific model could then be used to estimate mechanical properties of the rock mass based on fast and cost-effective non-destructive geophysical methods.

All together 32 physical properties were determined, from which various derived properties were then calculated, leading to a total of 277 measured properties, accounting for direction and level of axial loading. Considering that not all properties were measured from all specimens, this led to approximately 30 000 combinations of physical properties to shift through with a total of approximately 800 000 data points. Inspecting such a volume of data manually was not feasible given the schedule, and an automated pre-screening process was developed using the R statistics environment. R is a high-level language/environment somewhat similar to MATLAB but developed for statistical computing and graphics as a GNU project (The R Foundation, 2017). It provides tools for statistical analysis and high-quality plotting, is fully customisable and freely available under the Free Software Foundation's GNU General Public License (The R Foundation, 2017).

Specimens and experiments

Measurements focusing on petrophysical properties were carried out on 80 specimens from 12 drill cores in an investigation drift, containing veined gneiss (VGN, 39 pcs, 49 %), diatexitic gneiss (DGN, 13 pcs, 16 %) and granitic pegmatoid (PGR, 28 pcs, 35 %). For all specimens, density, porosity, magnetic susceptibility, remanent magnetisation, electrical resistivity at three frequencies (0.1 Hz, 10 Hz and 500 Hz), relative permittivity and P-wave velocity were measured. 20 of the most representative specimens were selected for S-wave velocity testing (referred to as Set 1a, while the other 60 specimens are referred to as Set 1b). Selection was based on 1) geological representativeness of the rock types, 2) how uniform a sequence the specimens create, and 3) proximity of the shallowest specimen in a sequence to the tunnel floor.

Mechanical testing was carried out on 52 specimens from 14 drill cores from the same investigation drift, containing veined gneiss (20+20 pcs, 77 %) in varying foliation orientations and granitic pegmatoid (6+6 pcs, 23 %). Of these specimens, 26 (referred to as Set 2a) were subjected to Brazilian test, and density, porosity, magnetic properties, electrical resistivity, relative permittivity and P-wave velocity were measured. The other 26 specimens (referred to as Set 2b) were subjected to uniaxial compressive strength (UCS) testing, and density, porosity, relative permittivity and P- and S-wave velocities under six levels of axial loading between 0.5 MPa and 20 MPa were determined. Various physical properties were calculated from the measured ones, including IP estimates, theoretical radar velocity and dynamic elastic parameters. From the UCS data, uniaxial compressive strength, crack initiation stress and crack damage stress levels, Poisson's ratio and Young's modulus were determined, and other static elastic parameters estimated. A summary of the tested properties by specimen set is shown in Table 1.

Table 1: Tested and calculated properties per set.

| PROPERTIES MEASURED | Set 1 | | Set 2 | |
|---|-------|----|-------|----|
| | 1a | 1b | 2a | 2b |
| Density | X | X | X | X |
| Porosity | X | X | X | X |
| Magnetic susceptibility | X | X | X | |
| Remanent magnetisation | X | X | X | |
| Electrical resistivity, $R_{0.1}$, R_{10} and R_{500} * | X | X | X | |
| Relative permittivity | X | X | X | X |
| P-wave velocity, unloaded | X | X | X | X |
| S-wave velocity, unloaded | X | | | X |
| P- and S-wave velocities, loaded | | | | X |
| Crack initiation stress | | | | X |
| Crack damage stress | | | | X |
| Uniaxial compressive strength | | | | X |
| Poisson's ratio (from UCS) | | | | X |
| Young's modulus (from UCS) | | | | X |
| Tensile strength | | | X | |
| *R0.1 is measurement at 0.1 Hz, R10 at 10 Hz and R500 at 500 Hz | | | | |
| **PL and PT values corresponding to resistivities at frequencies 0.1 Hz, 10 Hz and 500 Hz | | | | |
| ***"Elastic parameters" means the combination of P/S ratio, Acoustic impedance, Shear impedance, Poisson impedance, Poisson's ratio, Lamé's first parameters, Shear modulus, P-wave modulus, Bulk modulus and Young's modulus | | | | |

| PROPERTIES CALCULATED | Set 1 | | Set 2 | |
|------------------------------------|-------|----|-------|----|
| | 1a | 1b | 2a | 2b |
| Q-ratio | X | X | X | |
| IP estimates, PL and PT** | X | X | X | |
| Theoretical radar velocity | X | X | X | X |
| P/S-ratio, unloaded | X | | | X |
| Acoustic impedance, unloaded | X | X | X | X |
| Shear impedance, unloaded | X | | | X |
| Poisson impedance, unloaded | X | | | X |
| Poisson's ratio, unloaded | X | | | X |
| Lamé's first parameter, unloaded | X | | | X |
| Shear modulus, unloaded | X | | | X |
| P-wave modulus, unloaded | X | X | X | X |
| Bulk modulus, unloaded | X | | | X |
| Young's modulus, unloaded | X | | | X |
| Elastic parameters***, loaded | | | | X |
| Elastic parameters***, from UCS | | | | X |
| P- and S-wave velocities, from UCS | | | | X |
| CI/UCS –ratio | | | | X |
| CD/UCS –ratio | | | | X |

Statistical analysis

Statistical analysis of the gathered data was divided into two main categories: descriptive statistics and related visualisation, and association analysis. Descriptive statistics were determined for all 277 measured quantities, additionally separated by rock type, depth and location. Minimum, maximum, median and first and third quartile were plotted as boxplots, while mean, standard deviation and interquartile distance (IQR) were recorded for further reference. Calculation was automated in the R environment and used the standard algorithms *min*, *max*, *quantile*, *median* and *sd*. The boxplots were visually inspected to identify differences between samples from different depths in order to distinguish the excavation damaged zone (Figure 1).

In addition to the boxplots, scatter plots and kernel density estimates of the data were produced. Scatter plots were used to compare current data with previous values and thus validate the experimental setup. Anomalies within the current dataset could be identified from scatter plots of the current data (Figure 2), which could be linked to visually observed EDZ features (Figure 3). More subtle anomalies could be identified when overlaying the current dataset with previously observed distribution (Figure 4). Kernel density estimates were used to illustrate the shape of distributions and to compare samples in order to identify anomalies. Kernel density estimate resembles a histogram, but provides a seed (“kernel”) at the actual location of each data point, instead of dividing the data into bins. This means that the resulting curve is smoother than a histogram and converges faster to the actual shape of the distribution. Probability densities were normalised so that the peak value is 1. Kernel used was the Epanechnikovian kernel, and the kernel bandwidth was chosen to match the standard deviation of the kernel. Calculations were done with the standard R algorithm *density.default* and plotting using the *ggplot2* package.

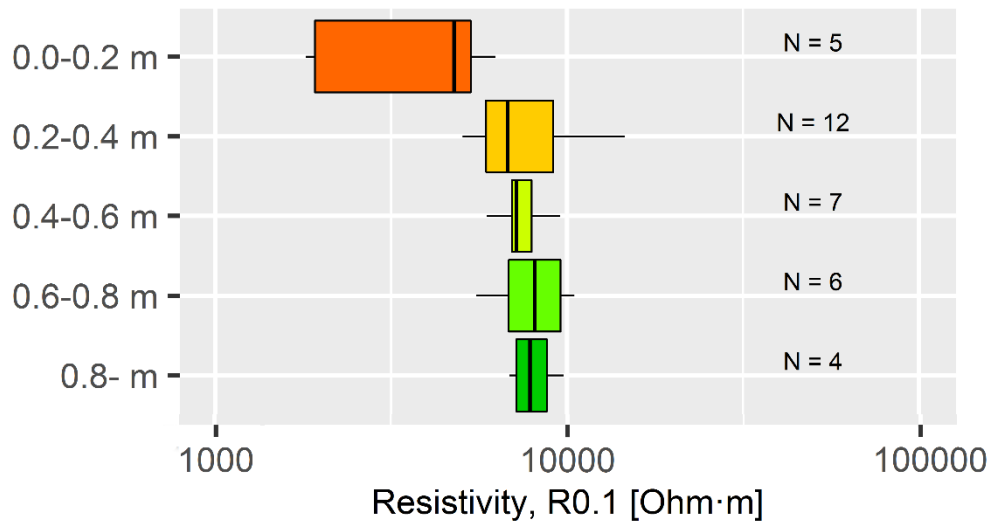


Figure 1: Resistivity measured at 0.1 Hz for granitic pegmatoid specimens separated into groups by depth from the excavated tunnel surface. Box shows quartiles, spikes represent minimum and maximum. Sample size is given on the right. The top most layer shows up clearly anomalous, with lower resistivity and higher variation. Adapted from Kiuru (2017).

Level of association between physical properties was tested by calculating Spearman rank correlation coefficients. The method is non-parametric, meaning it looks for a monotonic trend instead of linear dependency. This makes it less sensitive to outliers, and more suitable for use with complex or non-linear associations. Testing was done for all subsets (all data combined, separated by rock type, depth, location, level of loading etc.) regardless of whether any trends were expected to be visible.

From the calculated Spearman rho values, correlation matrices were formed for the various subsets. Trivial and known dependencies were removed from the matrices, and the remaining values were compared against corresponding critical Spearman rho values. Associations not exceeding the critical value were removed, leaving only statistically significant, unique, non-trivial associations.

Effort could then be focused on plotting and interpreting these associations. Due to the volume of data and interest of the study, plotting was further limited to depth from surface and porosity as explanatory variables, and to mechanical properties derived from the UCS and Brazilian tests as explained variables. Dynamic and static variants of a parameter were plotted against each other when applicable, regardless of the level of association. The resulting scatter plots were visually inspected and selected for interpretation if one of the following criteria was met: 1) the data showed a clear trend for the entire dataset or one of the rock types; or 2) the data showed shallow specimens as clearly anomalous. In addition, it was demanded that the data did not only separate rock types.

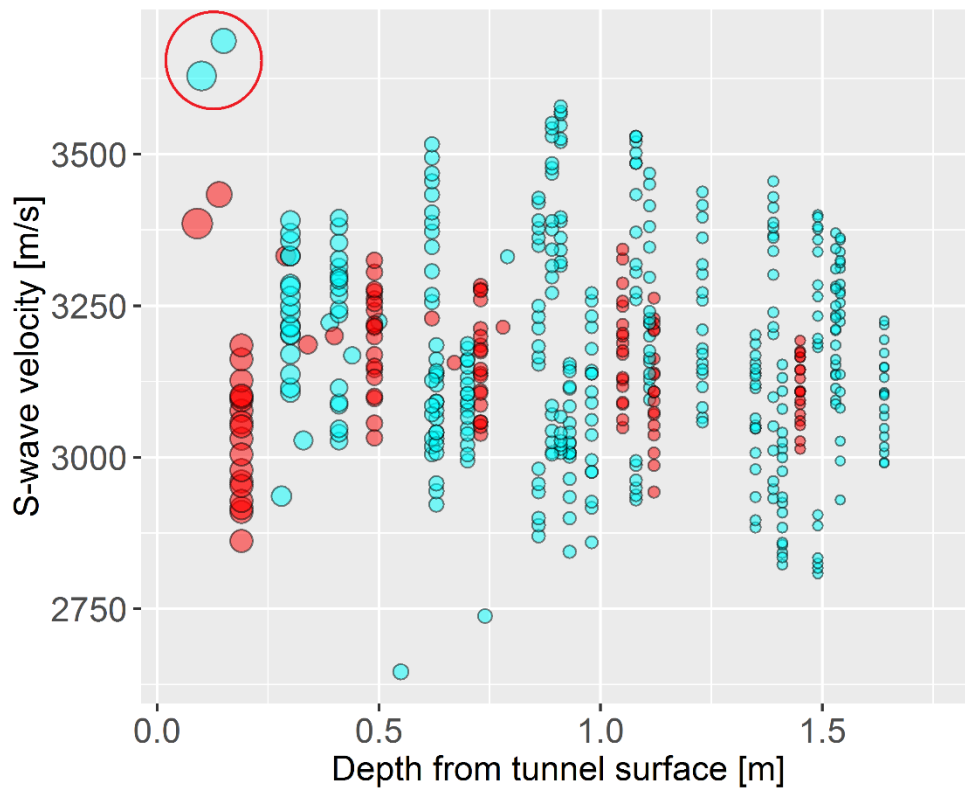


Figure 2: S-velocity in respect to depth from the excavation surface. Light blue is VGN and red is PGR. Larger symbols represent specimens closer to the surface. Specimens EDZ109 and EDZ110 are marked with red circle and shown in Figure 3. Adapted from Kiuru (2017).



Figure 3: Specimens EDZ109 and EDZ110 showing visible fracturing in the leucosome. The specimens appear as anomalous in plots of S-velocity (as shown in Figure 2), P/S-ratio, Poisson's ratio, shear impedance and Poisson impedance in respect to depth from the excavated surface. Adapted from Kiuru (2017).

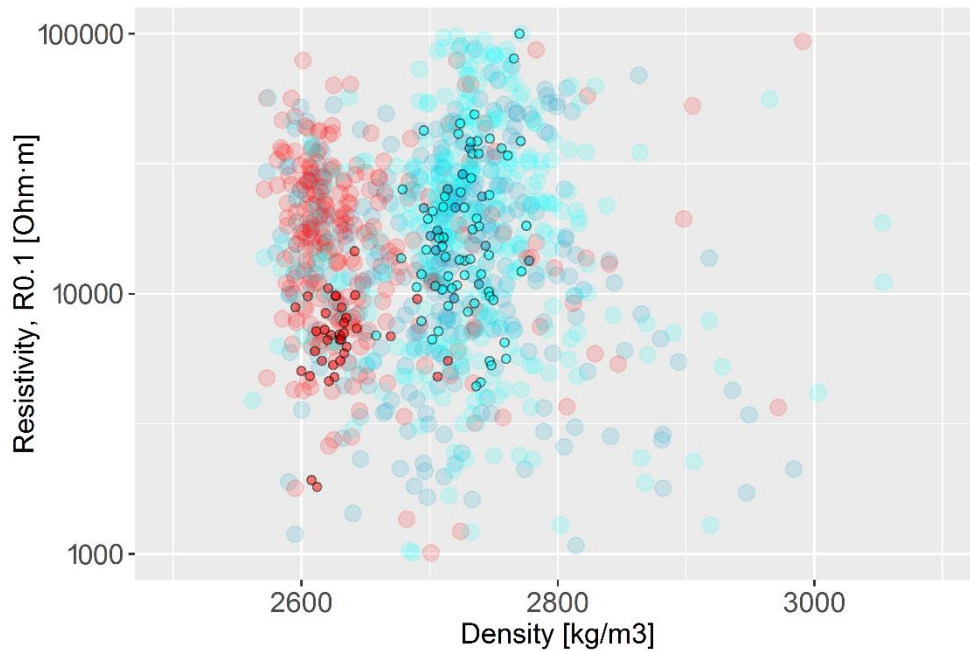


Figure 4: Cross plot of density and resistivity. Previous data with larger mostly transparent symbols, current dataset with smaller opaque symbols. Resistivity values for PGR (red) plot at the lower end of the previously observed range, similar effect is not seen for gneissic specimens (VGN light blue and DGN darker blue). Adapted from Kiuru (2017).

Conclusions

Using R as a tool for the statistical analysis allowed the treatment of the entire dataset in reasonable time, thus providing a screening of existing correlations between different properties of the rock specimens. Furthermore, detailed interpretation could then be focused only on associations of statistical significance, whether or not this was apparent from the data. Best indicators for excavation damage based on this study appear to be resistivity, S-wave velocity, shear impedance, shear modulus and Young's modulus.

Disclaimer and acknowledgements

The views expressed are those of the authors and do not necessarily reflect those of Posiva. We would like to thank Academy of Finland for funding (grant 297770), Posiva Oy for providing the possibility to publish the data, SP Technical Research Institute of Sweden, VTT Technical Research Centre of Finland and the Geological Survey of Finland for help with the measurements and Eero Heikkinen, Topias Siren, Fredrik Karell and Ilmo Kukkonen for their comments and insight.

References

- Kiuru, R., 2017. *EDZ Study Area in ONK-TKU-3620: Association Analysis of Petrophysical and Rock Mechanics Data*. Posiva Oy, Working Report 2016-42. In press.
- The R Foundation, 2017. *What is R?* At <https://www.r-project.org/about.html> (retrieved 30th November 2017).