

---

This is an electronic reprint of the original article.  
This reprint may differ from the original in pagination and typographic detail.

Bolbot, Victor; Theotokatos, Gerasimos; Wennersberg, Lars Andreas

**A method to identify and rank objects and hazardous interactions affecting autonomous ships navigation**

*Published in:*  
JOURNAL OF NAVIGATION

*DOI:*  
[10.1017/S0373463322000121](https://doi.org/10.1017/S0373463322000121)

Published: 01/05/2022

*Document Version*  
Publisher's PDF, also known as Version of record

*Published under the following license:*  
CC BY

*Please cite the original version:*  
Bolbot, V., Theotokatos, G., & Wennersberg, L. A. (2022). A method to identify and rank objects and hazardous interactions affecting autonomous ships navigation. *JOURNAL OF NAVIGATION*, 75(3), 572-593. [0373463322000121]. <https://doi.org/10.1017/S0373463322000121>

---

This material is protected by copyright and other intellectual property rights, and duplication or sale of all or part of any of the repository collections is not permitted, except that material may be duplicated by you for your research use or educational purposes in electronic or print form. You must obtain permission for any other use. Electronic or print copies may not be offered, whether for sale or otherwise to anyone who is not an authorised user.



RESEARCH ARTICLE

# A method to identify and rank objects and hazardous interactions affecting autonomous ships navigation

Victor Bolbot,<sup>1,2\*</sup>  Gerasimos Theotokatos,<sup>1</sup>  and Lars Andreas Wenersberg<sup>3</sup> 

<sup>1</sup> Maritime Safety Research Centre, Department of Naval Architecture, Ocean & Marine Engineering, University of Strathclyde, Glasgow, UK

<sup>2</sup> Research group on Safe and Efficient Marine and Ship Systems, Department of Mechanical Engineering (Marine Technology), Aalto University, Espoo, Finland

<sup>3</sup> SINTEF Ocean, Postboks 4762 Torgand, Trondheim 7465, Norway.

\*Corresponding author. E-mail: [victor.bolbot@strath.ac.uk](mailto:victor.bolbot@strath.ac.uk); [victor.bolbot@aalto.fi](mailto:victor.bolbot@aalto.fi)

**Received:** 21 June 2021; **Accepted:** 22 March 2022; **First published online:** 2 May 2022

**Keywords:** autonomous ships; autonomous navigation; targets identification; environmental complexity; safety requirements

## Abstract

The Autonomous Navigation System (ANS) constitutes a critical key enabling technology required for operating Maritime Autonomous Surface Ships (MASS). To assure the safety of MASS operations, the effective identification of potential objects and target ships interacting with the own MASS is quintessential. This study proposes a systematic method to identify the items interacting with the own MASS. This method is based on a similar approach previously employed for the encountering items' identification in robotics, which is customised herein for the MASS needs. The developed method is applied to a short-sea shipping MASS. The environmental features, agents and objects related to her navigation are identified and ranked based on the frequency of encounter and the potential collision consequences. The results demonstrate the ability of the method to identify additional items in comparison to Automatic Identification System based data. The interactions with the small ships are considered as the most critical, due to their potential accidental consequences and their exhibited high frequency of encounter. This study results are employed to support the ANS design and testing of the investigated ship.

## Abbreviations

AIS Automatic Identification System  
 ESHA Environmental Survey Hazard Analysis  
 FHA Functional Hazard Analysis  
 HAZID HAZard IDentification  
 HAZOP HAZard and OPerability study  
 LI Likelihood Index  
 MASS Marine Autonomous Surface Ships  
 NTSB National Transportation Safety Board  
 SI Severity Index  
 SSS Short Sea Shipping  
 STPA System–Theoretic Process Analysis

## 1. Introduction

The shipping industry has commenced its transformation towards autonomous operations by developing and adapting smart technologies and intelligent systems. Several initiatives focused on the development

of Maritime Autonomous Surface Ships (MASS), with major efforts pursued by industrial projects, such as Yara Birkeland (Yara, 2018) and ASKO (Smartmaritime, 2020), which have already launched commercial MASS. Additionally, various aspects of the MASS development have been addressed in recent research/innovation activities and projects, including MUNIN (MUNIN, 2016), AAWA (AAWA, 2016), SISU, SVAN (Daffey, 2018), AUTOSHIP (Bolbot et al., 2020) and others.

The Autonomous Navigation System (ANS) constitutes one of the key enabling technologies required to facilitate MASS operations. For MASS with high autonomy degree, the ANS is required to include the following functionalities: (a) identification of surrounding objects and weather conditions; (b) communication with other ships; (c) information provision to the Remote Control Centre for decision-making; (d) decision-making with respect to autonomous navigation; and (e) control of power demand requests from power and propulsion systems. The definitions are in line with functionalities for ANS provided in Chaal et al. (2020), however, it is acknowledged that these definitions can be different as reported in other studies (Rødseth et al., 2015; Wróbel et al., 2018; Ventikos et al., 2020; Basnet et al., 2022). In this study, the ANS is practically considered to be the electronic brain of the ship, which will replace the crew dealing with navigation. The functionalities (a)–(d) pertain to the ship's external interactions, whilst the functionalities (e) is associated with the ship's internal interactions.

Since the ANS is responsible for making decisions that directly impact the safety of the own ship and the target ships sailing in the same area, it should be considered as a safety-critical system, as also demonstrated by relevant risk assessments (Bolbot et al., 2021; Chang et al., 2021). There exist several examples of accidents occurred in other industries that use autonomy and involve similar navigation functionalities (Mirror, 2015; NHK, 2019; TechCrunch, 2019; NYTimes, 2021). The ANS design for technologically advanced systems is associated with a number of challenges, as reported in the literature (Guiochet et al., 2017; National Transportation Safety Board (NTSB), 2017). One of these challenges is pertinent to ensuring adequate situational coverage of the potential conditions that are likely to be encountered by the own ship, which is associated with the prevailing environmental complexity (Alexander et al., 2015). The term 'environmental complexity' refers to all those objects, target ships and potential interactions outside the ship, which the MASSs must deal with during their operation. In crewed ships, these interactions are addressed by employing effective seamanship practices (Zhou et al., 2020). For assuring the safety of the MASS operations, the surrounding obstacles and target ships must be systematically identified, so that in majority of operating and prevailing environmental conditions, the own MASS is capable of effectively detecting these surrounding objects and perform safe interactions (SASWG, 2020). This will result in fewer unknowns according to definitions reported in (Luft and Ingham, 1961), therefore reducing the potential for negative surprises (Kaplan and Garrick, 1981).

The preceding challenge can be tackled through systematic identification and analysis of the potential collision and interaction scenarios, proper understanding of the ANS interactions with the other ship systems (Abaei et al., 2021), as well as by developing effective testing and verification techniques (Pedersen et al., 2020; Torben et al., 2022) which would allow for providing sufficient confidence in the effectiveness of the ANS functionalities under varying conditions. Hence, for the safety assurance of the MASS operations, an adequate number of scenarios, including the critical ones, must be first identified and subsequently tested in both virtual and real environments. As the number of the potential scenarios is expected to be enormous, a formal method is required to limit the number of these scenarios to the extent possible and to conclude on the ones that eventually must be tested (either in virtual or in real environments) (Pedersen et al., 2020; Torben et al., 2022).

The navigation of ocean-going and short-sea ships is primarily regulated by the International Regulations for Preventing Collisions at Sea (COLREGS) (COLREGS, 1972). However, the COLREGS requirements have been developed to address crewed vessels operations (Woerner et al., 2019; Du et al., 2020; Lee et al., 2021), whereas operations with autonomous ships are not covered (COLREGS, 1972). As the COLREGS do not include numerical criteria for crew actions (Woerner et al., 2019; Abebe et al., 2021; Ni et al., 2021), their implementation relies on effective crew judgement (Du et al., 2020; Huang et al., 2020). Hence, the COLREGS cannot be employed to develop a comprehensive set of testing

scenarios and requirements in encountering cases between the own MASS and surrounding objects (target ships and obstacles) (Woerner et al., 2019; Torben et al., 2022).

The Automatic Identification System (AIS) provides data received from ship traffic systems on the ship's position, velocity and course direction. The AIS data can be employed for enhancing the ship's situational awareness during ship operation. Such data can also constitute a valuable source for identifying collision situations and was widely used for the analysis of traffic conditions as well as the identification of the most likely collision situations, as reported in pertinent studies (Mou et al., 2010; Goerlandt et al., 2017; Zhang et al., 2019; Gao and Shi, 2020; Kulkarni et al., 2020; Jinyu et al., 2021; Rawson and Brito, 2021). However, the use of AIS data for MASS encountering scenarios identification is questionable, as ships with their AIS transponder switched off, small recreational ships (for which AIS is not required), as well as objects other than ships and buoys are not included in this data set (IMO, 2015). Therefore, the sole use of the AIS data during the design phase of MASS will inevitably lead to several objects and interactions not being identified or considered.


This issue can be addressed by including continuous supervision of the own MASS from the remote operator (located in the remote control centre) (Rødseth et al., 2015) or allowing the MASS operations in strictly confined environments by limiting their operational envelope (Fjørtoft and Rødseth, 2020). This would inevitably lead to delays in launching MASS with a higher degree of autonomy, and would result in higher operational costs or significant operational limitations. This knowledge gap can be addressed by using the existing expertise of the ship crew for the operational environment and procedures in the design process.

To this end, a number of structured methods could be of help, including hazard identification methods such as HAZard IDentification (HAZID) (ISO, 2009b), HAZard and Operability (HAZOP) (ISO, 2009b), Functional Hazard Analysis (FHA) (SAE, 1996) and methods employing fuzzy ranking (Karahalios, 2020). These methods are well established and have for decades been used for the safety analysis of systems and operations in various industries (Thomas, 2013). Some of these methods were employed for the safety analysis of autonomous systems (Guiochet et al., 2017). However, these methods have been developed for systems with low or no autonomy degree, so they fundamentally may not be adequate to support the hazard identification process relevant to the autonomous systems.

Other advanced and well-established methods, such as the System–Theoretic Process Analysis (STPA) (Leveson and Thomas, 2018), have been employed in a number of hazard analysis studies for MASS (Wróbel et al., 2018; Valdez Banda et al., 2019; Utne et al., 2020; Ventikos et al., 2020; Yang et al., 2020). However, the environmental complexity poses a challenge that has not been fully addressed by STPA, as it focuses primarily on the system control functions and sociotechnical systems (Bolbot et al., 2019). Other methods addressing these problems have been proposed, such as Environmental Survey Hazard Analysis (ESHA) based on HAZID (Dogramadzi et al., 2014; Harper and Caleb-Solly, 2021), and combination of HAZOP with unified modelling diagrams (Guiochet, 2016). These methods address the issue of environmental complexity in more detail. However, these methods have not been properly marinised, as their initial area of application was the robotics; therefore, the characteristics related to the ship navigation are not considered.

Therefore, this study aims to develop a novel method to address the challenge of the environmental complexity and support the identification of potential hazardous interactions in MASS operations with the external environment. The applicability of the proposed approach is demonstrated by considering a Short-Sea Shipping (SSS) autonomous ship considering fully unmanned and remote operation within the Norwegian coastal area. In this respect, this study contributes to the identification of interacting elements with MASS, which is one of the objectives for autonomous systems safety assurance ((SASWG), 2020).

The novelty of this research stems from the marinisation and adaptation of ESHA method for the needs of MASS. The developed method is called ESHA–Mar (Mar denoting Maritime) and is distinguished from the ESHA through the inclusion of the following amendments: (a) a series of specific questions using input from ship operators and original equipment manufacturers are developed, which facilitate the identification of various types of subsurface, surface and aerial items/objects affecting the ANS performance; (b) the identification of potential consequences is based on the potential consequences

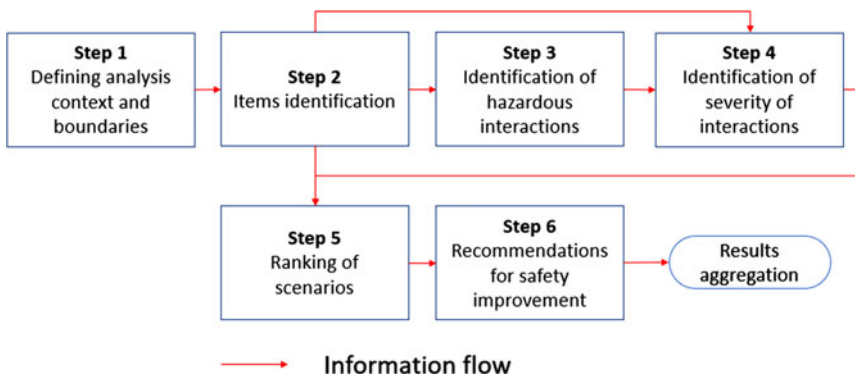

**Figure 1.** ESHA–Mar method overview.

types; and (c) the method is accompanied by suitable likelihood and severity index tables to support the systematic criticality ranking for the identified items.

The remaining of this study is structured as follows. Section 2 presents the developed method steps as well as their rationale. Section 3 provides the characteristics of the investigated ship. Section 4 elaborates the derived results and discusses the advantages and drawbacks of the proposed method. Lastly, Section 5 summarises the main conclusions and findings of this study.

## 2. Methodology


### 2.1. ESHA–Mar method overview

The ESHA–Mar method overview is provided in Figure 1. Step 1 includes the determination of the overall context and the study boundaries. Step 2 focuses on the systematic identification of the items (objects, agents, environmental features) outside the ship that interact with the own MASS. Step 3 addresses the identification of the hazardous interactions between the own MASS and the surrounding items with the support of guidewords. Step 4 identifies the severity of the identified scenarios. In Step 5, the identified scenarios are ranked using the information from previous steps. Step 6 provides recommendations for the improvement of the ANS. Lastly, the results of each step are used to populate a table with items, their interactions rankings and recommended protective barriers. These steps are elaborated in more detail in the next sections.

### 2.2. Step 1 – Defining the context

The MASS and its ANS operate in a specific area and, therefore, their operation is affected by the prevailing environmental conditions, such as, weather, current, waves, day light duration, and terrain characteristics (COLREGS, 1972). The autonomous navigation is constantly interacting with other ships and the existing infrastructure in the area (Rødseth et al., 2020). The ANS performance is not isolated from the influence from marine mammals and other humans that may be present in the area. The ANS operation is critical when the ship departs, sails or approaches a location, whilst it is not important when the ship is at berth or anchorage. Still, the autonomous navigation functionality is influenced by the tasks implemented by other actors in ports, e.g. maintenance of ANS (Pedersen, 2010). Figure 2 graphically depicts the involved interactions with the MASS.

In this respect, the first step of the proposed method is to define the relevant context and boundaries of the analysis. The investigated ship main particulars and the operational area, as well as the intended level of autonomy, are determined. This is required to define the boundaries of the ESHA–Mar analysis as well as the availability of potential safety barriers.

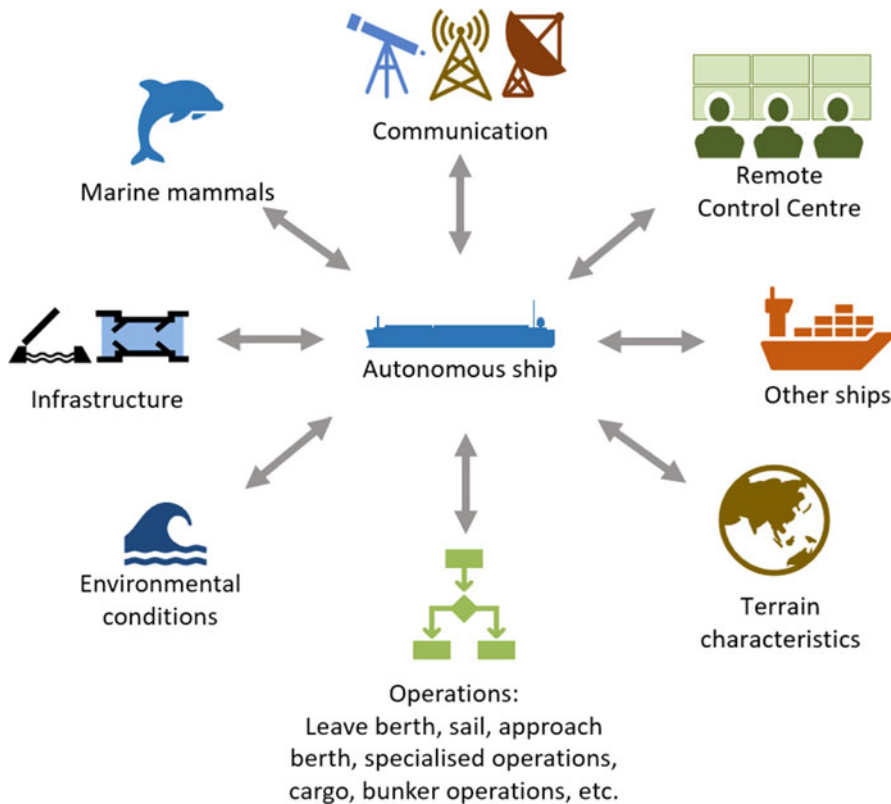

**Figure 2.** Elements of operational context for ANS.

### 2.3. Step 2 – Item identification

The external items affecting the performance of the ANS can be grouped in the following types (Dogramadzi et al., 2014): (a) environmental features, which constitute a permanent characteristic of the operating area; (b) objects which can exist in the operating area, and; (c) agents, which are objects, but ones that can move in a purposeful way. The environmental features can be broken down into terrain surfaces for the shore, water surface characteristics, (e.g. width of the fjord or canal and the below-water-surface conditions using the spatial criteria) as well as ambient conditions (e.g. prevailing weather conditions) and connectivity characteristics, which are considered independent properties describing the area. The objects could be classified based on their location as land, surface, subsurface or aerial. The agents could be split into marine mammal, humans and ships, based on their intelligence level. The humans can be further classified based on their location as being on shore, on ship, or in the water (e.g. swimmers). Similar classification applies for marine mammals and animals. The classification of items is provided in Table 1. This subclassification is required to address the items encountered in the maritime domain, and, thus, its inclusion in the developed methods render the latter differentiating from ESHA.

Once the different objects classification has been implemented, questions words, such as, What? How? When? Why? Who? Where? are used to develop more specific questions which would allow identification of items and their specific details based on the provided classification. Whilst these question words have been in use since antiquity (proposed by Aristotle) and are considered essential for information gathering, such as journalism (Sloan, 2010), the use of these question words in the specific context has not been reported in the literature. The developed questions are identified in cooperation with collaborating ship operators and are answered by the ship operator(s), and the obtained responses constitute the basis for the realisation of the next steps of ESHA–Mar.

**Table 1.** Classification of items and generated questions.

Items category	Items subcategory
Environmental feature	<ul style="list-style-type: none"> <li>– Terrain surfaces (shore characteristics)</li> <li>– What kind of terrain and buildings are available in the operating area?</li> <li>– Sea surface characteristics</li> <li>– What is the width/length/size of the maneuverable area?</li> <li>– Seabed characteristics (below sea surface)</li> <li>– What is the water depth in each operating area?</li> <li>– Ambient conditions over the year</li> <li>– What are the prevailing environmental (ambient/weather/current) conditions in the operating area?</li> <li>– How often are adverse weather conditions observed?</li> <li>– Connectivity characteristics</li> <li>– What are the connectivity characteristics in the operating area?</li> </ul>
Objects	<ul style="list-style-type: none"> <li>On the water surface</li> <li>Beneath surface</li> <li>Above surface</li> <li>On shore</li> <li>What kind of stable/moving objects can be met in each area and operating phase?</li> </ul>
Agents	<ul style="list-style-type: none"> <li>– Ships <ul style="list-style-type: none"> <li>What types of ships?</li> <li>How frequently are types of ships encountered?</li> <li>What communication equipment is installed on each ship?</li> <li>What is the crew size/passenger number?</li> <li>Where are the ships encountered?</li> <li>What is the maximum/typical speed of these ships?</li> <li>What specific types of operations can be implemented by these ships?</li> <li>What visual/audio signals do these ships receive/transmit?</li> </ul> </li> <li>– Humans <ul style="list-style-type: none"> <li>In water</li> <li>On ship</li> <li>On the shore</li> <li>What kind of people can be met in each location?</li> </ul> </li> <li>– Animals <ul style="list-style-type: none"> <li>In water</li> <li>On ship</li> <li>On shore</li> <li>In the air</li> <li>Which marine mammals can be met and what is their size?</li> <li>What kind of signals these marine mammals emit?</li> </ul> </li> </ul>

#### 2.4. Step 3 – Identifying hazardous interactions with items

Once the items with their basic characteristics have been specified, the next step is the identification of the hazardous interactions between the own MASS and the ship. This is implemented by considering the interactions between the ship and the items and specifying the potential failures in interactions. The interactions with other ships are identified using information from COLREGs on potential encountering situations and specific words, such as, overtaking, following, crossing, communication exchange via

**Table 2.** Likelihood index (LI) for encounter.

Per year	Per day	Per month	Linguistic expression	Ranking	
				Characterisation	Numerical value
10,000	27.4	833	Tens per day of operation	Very High (VH)	5
1000	2.7	83.3	Once–twice per day of operation	High (H)	4
100	0.3	8.3	Once per several days of operation	Moderate (M)	3
10	0.03	0.83	Once in a month of operation	Low (L)	2
1	0.003	0.083	Once in a year of operation or less	Very Low (VL)	1

audio/visual means, approaching, etc. For the other items, expert knowledge along with the words, such as affect, influence, impact, avoid and recognise, are used. For identifying the hazardous interactions, guide words from FHA (Scharl et al., 2014), HAZOP (ISO, 2009a) and STPA (Leveson and Thomas, 2018) are employed, such as provided, not provided, provided too early/late, too much, too little and too early. In this step, the developed method does not significantly differentiate from ESHA method.

### 2.5. Step 4 – Identifying potential consequences

The consequences are identified using the information retrieved from the previous steps based on the item properties (e.g., crew/passenger number, speed, size, location) and hazardous interactions. The consequences are specified in terms of influence of the items on the ship and the associated financial, safety, environmental or reputational impacts, in a similar fashion with the ones considered in Bolbot et al. (2021). This allows for consideration of a wider spectrum of potential risks, compared to the case where only safety risks are investigated.

### 2.6. Step 5 – Ranking

The ranking of the hazardous interactions is implemented using the following strategy. The likelihood of encounter index (LI) is specified for each identified item based on Table 2. The likelihood ranking is supported by the first step output, through information provided by the ship operator. The severity index (SI) is assigned to an item based on the severity of consequences (financial, safety, environmental, reputational) retrieved from the previous step. The sum of the likelihood of encounter (LI) and severity index (SI) is used to compare the criticality of the potential ship encounters with different items.

This sum is not equivalent to risk index used in Formal Safety Assessment studies (IMO, 2018a), as instead of the frequency of occurrence, the frequency of encounter is used herein; this study purpose is not to determine the safety level, but rather to identify which of the items are more critical for the ANS design. In this way, the ESHA–Mar method allows for the identification of items that are encountered more frequently and must be carefully considered during the ANS design.

The ranking is implemented based on the scales provided in Tables 2 and 3. The indices tables correspond to logarithmic values of risk metrics, which is a useful property, as demonstrated by previous studies (Levine, 2012; Duijm, 2015). The criticality of each item is determined in relation to the criticality of other items. When ranking scenarios with multiple consequences (reputational, environmental, etc.), the worst-case consequence (with the highest severity) is used. The incorporation of the criticality ranking is also a novel contribution of this study compared to ESHA.

The likelihood index table (Table 2) was developed based on the potential frequency of encounter situations. The range of potential frequencies was determined based on the discussions with the ship operators and subsequently adjusted in logarithmic scales. The severity index table (Table 3) was



**Table 3.** Severity index (SI) for severity of consequences.

Linguistic expression	Ranking	
	Characterisation	Numerical value
Tens of deaths, or Damages in the region of \$80M, or Extensive negative coverage in international media leading to changes in international regulations, or Long-term environmental consequences;	Very High (VH)	5
One death or several serious injuries, or Damages in the region of \$8M, or Extensive coverage in the national media leading to changes in local regulations, or Severe impact on environment;	High (H)	4
Serious injuries, or Damages in the region of \$800 k, or Slight media attention considerable region attention, or Significant impact on the environment;	Moderate (M)	3
One or more require first aid, or Damages in the region of \$80 k, or Limited impact/limited media concern, or Limited impact on the environment;	Low (L)	2
One minor injury, or Damages in the region of \$8 k, or Local public awareness, or Minor environmental impact	Very Low (VL)	1

determined considering the IMO risk severity index provided in the Formal Safety Assessment guidance (IMO, 2018a), and is based on the provided scale for safety consequences (IMO, 2018a). The cost of averting the fatality was set at \$3M corresponding to 1999 (IMO, 2018a). By using a 5% inflation rate, according to the FSA guidance (IMO, 2018a), a single fatality becomes equivalent approximately to \$8M in 2021. The correlation between other types of consequences and safety risks was derived by comparing the table in FSA (2018a) with pertinent tables provided by BV (Bureau Veritas, 2019), DNV GL RP A-203 guidelines (Ahluwaja, 2018) and the EMSA report (EMSA, 2020).

### 2.7. Step 6 – Protective barriers recommendations

During this step, measures that reduce the likelihood and the severity of potential hazardous interactions are determined. As described in (ISO/IEC, 2016), the risk can be reduced by: (a) avoiding risk, e.g. changing the operational area; (b) removing the risk source, e.g. reducing the operation when other ships are present; (c) influencing the likelihood, e.g. adding control barriers; (d) mitigating the consequences, e.g. enhancing the response; (e) sharing risk through insurance; and (f) more effectively detecting of the hazardous interactions. Environmental factors which cannot be controlled but positively influence the operating conditions resulting in risk reduction are also mentioned with the same material.

### 2.8. Results aggregation

Once Steps 1–6 have been completed, the generated results are aggregated, as presented in Table 4. In specific, the first five columns represent the results generated during the second step (the identified items

**Table 4.** For caption see next page.

1	2	3	4	5	6	7	8
No.	Operating phase	Item type	Item	Item characteristics	Frequency of encounter	Likelihood (LI) range/value	Interactions
1	Transit Approach- ing ports Leaving ports	Agent	High-speed craft (also police craft)	Speed 20–40 kn; 4–10 passengers; length 6–12 m; navigational lights horns are employed; VHF and AIS are not required (required for the police craft)	10 during sum- mer voyage 3 during winter voyage	H/4	<ul style="list-style-type: none"> <li>– This ship can overtake the SSS MASS</li> <li>– The SSS MASS must avoid the collision with this ship (this involves communicating with the other ship and making autonomous navigation manoeuvre)</li> <li>– Giving way according to COLREGs</li> </ul>

**Table 4.** Aggregating the ESHA–Mar results – an example.

1	9	10	11	12	13	14
No	Interaction failure type	Interaction failure details	Consequences	Severity (SI) Ranking /value	Ranking of Encounter (LI + SI)	Recommendations for protective barriers and environmental factors
1	Wrong/not provided	<ul style="list-style-type: none"> <li>– Wrong overtaking of the SSS MASS and wrong control action from the SSS MASS</li> <li>– Not providing autonomous navigation or providing wrong autonomous navigation by the SSS MASS ANS</li> <li>– Not communicating with the ship</li> </ul>	<p>SSS MASS colliding with the high-speed craft or colliding with another ship during the navigation manoeuvre;</p> <p>Damages to the ships and highly negative coverage in media;</p> <p>Potential loss of human life</p>	VH/5	9	<ul style="list-style-type: none"> <li>– Ships are not on collision course</li> <li>– Other ship taking action to avoid collision</li> <li>– RCC detecting and intervening the collision condition</li> </ul>

and their characteristics); the information in columns 8 to 10 is determined during the third step, where the relevant hazardous interactions are determined; column 11 includes information from Step 4 by depicting the potential consequence of hazardous interactions; and columns 6 to 7 and 12 to 13 include the ranking results and recommended barriers are provided in column 14. The presented aggregation is useful for presenting the final results, allowing for more effective communication and management of the generated information. This procedure is also followed in other risk assessment methods, such as Failure Modes and Effects Analysis (Wang, 2017), HAZOP (ISO, 2009a) and STPA (Leveson and Thomas, 2018).

### 3. Use case description

The proposed method is tested for the theoretical use case of a SSS vessel, which is considered to render the actual demonstrator to operate in a fully unmanned mode. The SSS use case main particulars are provided in Table 5, taken from Wennersberg and Nordahl (2019) and Faivre and Nzengu (2020). It must be noted that the actual demonstrator and the use case investigated herein, albeit share some similarities, are ships with different installed systems and autonomy degrees.

The investigated SSS use case (or MASS) is considered to have an autonomy degree of 3, according to IMO definitions used for the Regulatory Scoping Exercise (RSE) (IMO, 2020), which specifies ‘Remotely controlled ship without seafarers on board: The ship is controlled and operated from another location. There are no seafarers on board.’ Therefore, the SSS use case is assumed to use a Remote Control Centre (RCC), which controls the ship operations. Still, the ANS remains the first point of decision-making during sailing. The investigated MASS is considered to be operating outside the coast of Norway distributing fish feed to fish farms. The information presented in the next sections was gathered through interviews with the ship operator.

## 4. Results and discussion

### 4.1. Step 2 – Items identification

As the description of the case study practically corresponds to the results of the first step of ESHA–Mar, the paper proceeds immediately with the presentation of the next results steps. The list of items of interest for the investigated ship are provided in Table 6. This list includes environmental features, various objects and a number of agents. Note that the list is much more extensive than the one potentially obtained through the AIS data. A number of recreational ships have been identified, such as kayaks or water scooters or objects which might have their AIS transponder switched off, including military ships. Some other recreational ships, such as wind kites and windsurfers, are also identified, however their presence is expected to be unlikely in the considered area. It should be noted that the frequency of encounter with some of the objects and ships varies with the season. The interviewed participant indicated that sensitive mammals do not exist in the investigated area. All these items can be considered during training of the situation awareness system under a number of environmental conditions, which have been also specified by the operator under the category of environmental features.

It should be noted that some of the environmental features, such as ambient temperature over the year, were specified by the ship operator. However, this initial input could be supported by more detailed data from meteorological services. The AIS data in a similar way could support the estimation of likelihood of encounters with the ships carrying AIS transponder.

### 4.2. Step 3 – Identifying hazardous interactions with items

Not all of the items specified in Table 6 were identified to have direct hazardous interactions with the own SSS MASS. For instance, the powerlines and bridges in the operational area were found to have a significant height, thus creating no obstruction to the MASS operation. Rubbish on the surface were also

**Table 5.** SSS main particulars of the vessel employed as the SSS use case.

Description	Value	Unit
Length overall	74.7	m
Length between perpendiculars	72.9	m
Breadth moulded	13.6	m
Draught (maximum)	5.1	m
Gross tonnage	2145	t
Deadweight	1743	t

**Table 6.** List of identified items.

Items category	Items
Environmental feature	Ambient temperature, depth variation, currents, waves, winds, precipitation, hills, fjords, illumination
Objects	Navigational signs, powerlines in the area, bridges, buoys, rubbish on the surface, rubbish in the air, emergency signals from ships, timber, containers, iceberg, fishing nets
Agents	Humans in the water, intruders on the ship, divers, people at fish feed factory, birds, insects, high-speed craft, sailboats, fishing ships, fishing ships with nets, kayaks, high-speed passenger craft, big cargo ships, survey ship, regular ferry boats, military ships (Coast Guard, frigate), windsurfers, wind kites, scooters, tug with tugboats, water skiers, humans waving at the other ships, submarines


considered as not causing any damage to the MASS. Yet a scenario can be considered when the height of cables is lowered due to natural disaster or retrofit, or rubbish impeding the recognition of persons in the water. A change in the operational area also can make bridges hazardous for the MASS. A number of interactions were also specified in the analysis, such as an unlikely but possible scenario of a flying plastic bag impeding the visual coverage of cameras, iceberg in the area or floating timbers/containers hitting the ship.

This is one of the ESHA–Mar properties, as several questions results in not-so-obvious responses. Therefore, the identified interactions do not generate immediate hazards, however they can become hazardous under specific circumstances (of low likelihood). This is a by-product of an effort to expand the present knowledge area. When considering a novel technology such as MASS, this is rather a requirement to go through this procedure, since it is important to reduce the potential of unpredicted interactions (Kaplan and Garrick, 1981).

For the interactions of the own SSS MASS with the other ships, it was considered that either failures in communication, objects recognition or improper interactions during manoeuvring, such as violations of COLREGs, can occur. With respect to the environmental features, it was found that they affect the equipment performance, such as salty stains on the cameras. Therefore, it is required to test the equipment/algorithm performance under varying environmental conditions, such as salty deposits on the cameras, or to arrange periodic cleaning maintenance.

#### 4.3. Step 4 – Identifying potential consequences

With respect to consequence, the highest ranking (SI = 5) was provided to the interactions between the own MASS and small ships with more than one crew/passenger number, such as sailing boats, fishing

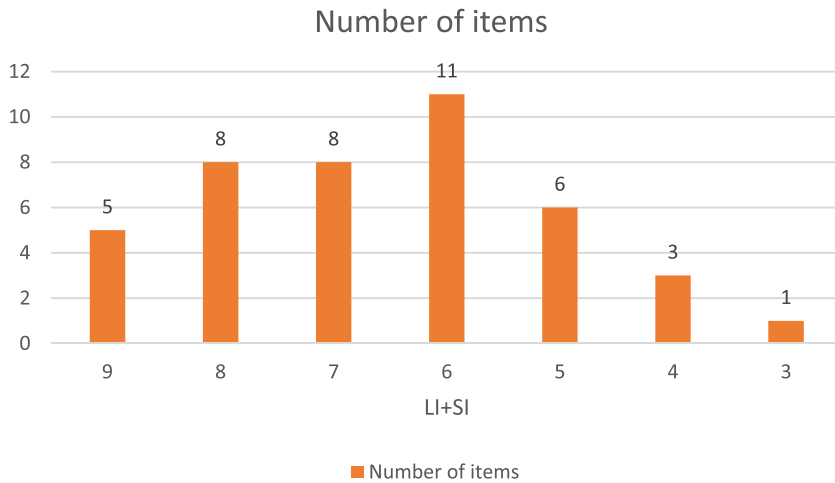

**Figure 3.** Items ranking.

ships, high-speed craft, etc. Due to their size, these ships have small damage and intact stability and can be easily capsized after collision with the MASS, endangering the lives of passengers/crew (Atzamos et al., 2018). This is in line with several studies highlighting the high accident rates on small ships (de Vos et al., 2021; Wang et al., 2021). The possibility of collisions with other ships or icebergs were considered as less severe ( $S = 4$ ). However, collision for a MASS may lead to negative coverage in the public media, since it is a novel technology, as it also occurred in other industries (Penmetsa et al., 2021) and, therefore, these potential collisions should be addressed. Damages to infrastructure or degradation of equipment performance due to environmental factors were assigned lower severity ( $SI = 3$ ) based on the performed discussions. Contact with objects, such as timbers, containers or mooring buoys, were given even lower severity ( $SI = 2$ ) due to the relatively large size of the own ship compared to these objects. Finally, some of the items, such as rubbish and birds on the surface, received the least severity ( $SI = 1$ )

#### 4.4. Step 5 – Ranking

Based on the previous steps, the distribution of rankings and the most critical items are provided in Figure 3 and Table 7, respectively. Note from Table 7 that the most critical items are small ships. This can be attributed to the fact the encounters with small ships are frequent in the operating area, and potential implications in case of collision are rather severe ( $LI + SI = 9$ ). The collision with other ships is not so frequent or is less severe ( $LI + SI = 8$ ). The influence of environmental features is considered of less importance, as they affect the equipment performance that might mostly result in grounding incidences and, therefore, damages; however, such incidences frequently occur in the specific area and should be definitely taken into account. A notable exception are the environmental features of foggy and rainy conditions and the presence of hills, which impact the visibility during navigation and (the presence of hills affect the radar image and line of sight which are important when navigating in proximity to shore), therefore, can lead to collision. This justifies their high ranking ( $LI + SI = 8$  or  $7$ ). Hazardous interactions with infrastructure or collision with wind kites/ windsurfers were ranked lower ( $SI + LI = 7$  or  $6$ ), as the resultant damages are ranked as moderate, or there exists low likelihood for such encounters (as for windsurfers). Interactions with humans in water were ranked as low ( $SI + LI = 5$ ), as they are expected to be highly unlikely in the cold Norwegian waters, despite having potentially rather severe consequences. Interactions with military ships, both surface and submarines, are considered of lowest rank ( $LI + SI = 4$ ), as they are deemed highly unlikely in the specific area and of lower severity due to the MASS comparably smaller size and severity of collision.

**Table 7.** For caption see next page.

No.	Operating phase	Item type	Item	Item characteristics	Frequency of encounter	LI	Interactions
1	<ul style="list-style-type: none"> <li>– Transit</li> <li>– Approaching ports</li> <li>– Leaving ports</li> </ul>	Agent	High-speed craft (also police craft)	Speed 20–40 kn, 4–10 passengers, length 6–12 m, navigational lights, horns are provided, VHF and AIS are not required	10 during summer voyage; 3 during winter voyage	H/4	<ul style="list-style-type: none"> <li>– This ship can overtake the SSS</li> <li>– The SSS will need to avoid the collision with this ship (this involves communicating with other ship and making autonomous navigation manoeuvres)</li> <li>– Giving way according to COLREGs</li> <li>– identifying the ship</li> <li>– The SSS will need to avoid the collision with this ship, giving way according to COLREGs (this involves communicating with other ship and making autonomous navigation manoeuvres)</li> </ul>
2	<ul style="list-style-type: none"> <li>– Transit</li> <li>– Approaching ports</li> <li>– Leaving ports</li> </ul>	Agent	Sailboats	Speed 5–10 kn, 4–10 passengers, length 6–12 m, navigation lights and horns are available, VHF and AIS is not required	8 during summer voyage; 0–1 during winter voyage	H-4	<ul style="list-style-type: none"> <li>– The SSS will need to avoid the collision with this ship, giving way according to COLREGs (this involves communicating with other ship and making autonomous navigation manoeuvres)</li> </ul>

*Continued.*

*Table 7. For caption see next page.*

No.	Operating phase	Item type	Item	Item characteristics	Frequency of encounter	LI	Interactions
3	<ul style="list-style-type: none"> <li>– Transit</li> <li>– Approaching ports</li> <li>– Leaving ports</li> </ul>	Agent	Fishing ship	Speed 8–15 kn, 1–6 crew, length 10–20 m, navigation lights and horns are available, VHF and AIS is required	10 during voyage	H-4	<ul style="list-style-type: none"> <li>– The SSS will need to avoid the collision with this ship (this involves communicating with other ship and making autonomous navigation manoeuvres)</li> <li>– Identifying the ship</li> </ul>
4	<ul style="list-style-type: none"> <li>– Transit</li> <li>– Approaching ports</li> <li>– Leaving ports</li> </ul>	Agent	Fishing ship with nets	Speed 0 kn, 1–6 crew, length 10–20 m, navigation lights and horns are available, VHF and AIS is required	3 during voyage	H-4	<ul style="list-style-type: none"> <li>– The SSS will need to avoid the collision with this ship (this involves communicating with other ship and making autonomous navigation manoeuvres) According to COLREGs way should be given - Identifying the ship</li> </ul>
5	<ul style="list-style-type: none"> <li>– Transit</li> <li>– Approaching ports</li> <li>– Leaving ports</li> </ul>	Agent	High-speed passenger craft	Speed 30 kn, length 40 m, 120 passengers, navigational lights, horns, AIS is required	4 during voyage (any season)	H-4	<ul style="list-style-type: none"> <li>– The SSS will need to avoid the collision with this ship (this involves communicating with other ship and making autonomous navigation manoeuvres) According to COLREGs way should be given</li> <li>– Identifying the ship</li> </ul>



**Table 7.** For caption see next page.

No.	Interaction failure type	Interaction failure details	Consequences	SI	LI + SI	Protective barriers and environmental factors that can be considered
1	Wrong/not provided	<ul style="list-style-type: none"> <li>– Wrong overtaking of the ship and wrong control action from the MASS</li> <li>– Not providing autonomous navigation or providing wrong autonomous navigation by the ship</li> <li>– Not communicating with the ship</li> <li>– Not identifying the ship</li> </ul>	Ship colliding with the craft or colliding with other ship Capsize of the small ship	VH/5	9	<ul style="list-style-type: none"> <li>– Ships are not on collision course (positive environmental factor)</li> <li>– Other ship taking action to avoid collision</li> <li>– RCC detecting and intervening in the collision condition</li> </ul>
2	Wrong/not provided	<ul style="list-style-type: none"> <li>– Not providing autonomous navigation or providing wrong autonomous navigation by the ship</li> <li>– Not communicating with the ship</li> <li>– Not identifying the ship</li> </ul>	Ship colliding with the sailboats or colliding with other ship/Damages to the ships and potential loss of life for sailboat passengers	VH-5	9	<ul style="list-style-type: none"> <li>- Ships are not on collision course (positive environmental factor) - Other ship taking action to avoid collision - RCC detecting and intervening in the collision condition</li> </ul>

*Continued.*

*Table 7. Identified most critical items.*

No.	Interaction failure type	Interaction failure details	Consequences	SI	LI + SI	Protective barriers and environmental factors that can be considered
3	Wrong/not provided	<ul style="list-style-type: none"> <li>– Not providing autonomous navigation or providing wrong autonomous navigation by the ship</li> <li>– Not communicating with the ship</li> <li>– Not identifying the ship</li> </ul>	Ship colliding with the fishing boat or colliding with other ship/Potential capsizing of the fishing ship	VH-5	9	<ul style="list-style-type: none"> <li>– Ships are not on collision course</li> <li>– Other ship taking action to avoid collision (positive environmental factor)</li> <li>– RCC detecting and intervening in the collision condition</li> </ul>
4	Wrong/not provided	<ul style="list-style-type: none"> <li>– Not providing autonomous navigation or providing wrong autonomous navigation by the ship</li> <li>– Not communicating with the ship</li> <li>– Not identifying the ship</li> </ul>	Ship colliding with the fishing boat or colliding with other ship or fishing net entangled in the propeller/Potential capsizing of the fishing ship	VH-5	9	<ul style="list-style-type: none"> <li>– Ships are not on collision course (positive environmental factor)</li> <li>– RCC detecting and intervening in the collision condition</li> </ul>
5	Wrong/not provided	<ul style="list-style-type: none"> <li>– Not providing autonomous navigation or providing wrong autonomous navigation by the ship</li> <li>– Not communicating with the ship</li> <li>– Not identifying the ship</li> </ul>	Ship colliding with the passenger ship / Damages to the ships with potential sinkage	VH-5	9	<ul style="list-style-type: none"> <li>– Ships are not on collision course (positive environmental factor)</li> <li>– Other ship taking action to avoid collision</li> <li>– RCC detecting and intervening in the collision condition</li> </ul>

#### 4.5. Step 6 – Protective barriers recommendations

Based on the analysis results, the focus herein should be put on preventing collisions with smaller ships. The likelihood of incidents can be reduced by having strict requirements for the detection accuracy of small ships by the situation awareness system, as well as by using alert systems which would notify the remote-control centre if a large unclassified object of small ship size is detected. Furthermore, the equipment performance and reliability must be tested in the identified environmental conditions. If the required equipment performance cannot be ensured, operational measures, such as reducing the speed in foggy conditions, might be needed. In such cases, it would be highly beneficial to obtain more data from the meteorological services. Collision with the ships operating in the area can be avoided if collision paths are identified and the RCC crew closely monitors the hazardous encounter situation, or adequate confidence in the ANS performance is obtained through extensive testing and operation.

#### 4.6. Discussion

The implementation of the proposed ESHA–Mar method resulted in the identification of the items interacting with the own MASS through the use of a structured approach. This structured approach uses the operator expertise to reduce uncertainty related to ship navigational parameters and to translate them into the ANS requirements expressed by protective barriers.

This method also supported the identification of objects not visible in AIS, thus providing a more complete picture of the operational envelope, compared to the case where only AIS data are used. The hazardous interactions of the own MASS with these items were also identified and ranked, and the most critical of them were pointed out, thus supporting the risk-based cost-efficient MASS design. The list of the identified objects and agents can be fed as input to the design of the situation awareness system ensuring the ANS safety by specifying more stringent requirements for detecting the most critical objects. A list of recommendations for protective barriers that can be considered in the ANS design was also generated. ESHA–Mar, in its present or enhanced form, can be applied to other ships and operational areas.

The ESHA–Mar method has some limitations. Since the main results were retrieved based on the ship operator input, they exhibit a strong element of subjectiveness. Increasing the number of operators participating in the analysis is expected to reduce this subjectivity and enhance the confidence on the method results. Furthermore, ESHA–Mar is based on a breakdown of the complex environment into constituent parts without considering some more complex emergent conditions, such as interactions between MASS and multiple ships, which is a by-product of the problem simplification. Additional time during discussions was also dedicated to low encounter likelihood and reduced severity scenarios during the implementation of the ESHA–Mar. Still, these results can accelerate significantly the introduction of the MASS, as they will reduce the likelihood of encountering unknown objects, which might not be considered due to the lack of systematicity and hence, the likelihood of improper interactions of the own MASS with these objects.

Furthermore, the complex interactions that can arise between humans and MASSs have not been considered in detail. Other methods which incorporate human reliability analysis or STPA would be employed to address this limitation. These methods could benefit from the ESHA–Mar results by using as input the list of identified items and interactions. The ESHA–Mar method can be also complemented using information from AIS and weather data, which would allow for more accurate ranking of the identified items. All of these limitations pose directions for future research.

It is recommended to implement the ESHA–Mar method by organising workshops or brainstorming sessions, where the experts (the ship operators/bridge officers) in a physical or online meeting provide their answers and feedback on the questions that arise during the application of Steps 1 to 6. In this respect, the application of the method will not differentiate from the typical HAZID sessions (ISO, 2009b) that are used in the maritime industry (IMO, 2018b). Alternatively, the questions could be shared to the experts, who can provide their responses in several rounds, whereas a coordinator undertakes

the compilation of the collected responses into a common report. In such a case, the use of the Delphi technique (Dalkey and Helmer, 1963) could be of advantage.

## 5. Conclusions

In this study, a novel method (ESHA–Mar) for identification of the MASS interactions with other items was presented. The ESHA–Mar was applied to unmanned and remotely controlled versions of the short-sea shipping use case of the AUTOSHIP project, demonstrating its effectiveness in the identification of the interacting items.

The main findings of this study are summarised as follows.

- The ESHA–Mar method supported the identification of several objects and of hazardous interactions in a systematic manner, especially for those that are not visible from AIS data.
- ESHA–Mar also supported the ranking of the objects based on the frequency of encounter and severity of potential interactions, and therefore, the prioritisation of the resources during ANS development.
- With the support of ESHA–Mar, design recommendations for the situation awareness system and components of ANS were derived.
- For the investigated use case, it was found that the small ships constitute a significant source of hazard due to their frequent presence in the operational area and potential collision consequences.
- The identified objects can be used as input to training on situation awareness system reducing the likelihood of observing the unknown objects.
- It is recommended that the functionality of the equipment is tested in a wide spectrum of environmental conditions.

It is expected that the presented ESHA–Mar method will constitute a valuable tool for the MASS designers accelerating the process of designing and accepting the ANS. ESHA–Mar can be further improved through combination with data acquired from AIS, meteorological information, or through combination with other methods, which poses directions for future research.

**Acknowledgements.** The study was carried out in the framework of the AUTOSHIP project (AUTOSHIP, 2019), which is funded by the European Union's Horizon 2020 research and innovation programme under agreement No. 815012. The authors affiliated with the Maritime Safety Research Centre (MSRC) greatly acknowledge the funding from DNV AS and RCCL for the establishment and operation of the MSRC. The authors also thank the individuals from Eidsvaag and Kongsberg Maritime for their comments. The opinions expressed herein are those of the authors and should not be construed to reflect the views of EU, DNV AS, RCCL, Eidsvaag, Kongsberg Maritime or other involved partners in the AUTOSHIP project.

## References

- AAWA. (2016). AAWA project introduces the project's first commercial ship operators [Online]. Available at: <https://www.rolls-royce.com/media/press-releases/2016/pr-12-04-2016-aawa-project-introduces-projects-first-commercial-operators.aspx> [Accessed 12/12/2019].
- Abaei, M. M., Hekkenberg, R. and Bahootoroddy, A. (2021). A multinomial process tree for reliability assessment of machinery in autonomous ships. *Reliability Engineering & System Safety*, **210**, 107484.
- Abebe, M., Noh, Y., Seo, C., Kim, D. and Lee, I. (2021). Developing a ship collision risk Index estimation model based on Dempster-Shafer theory. *Applied Ocean Research*, **113**, 102735.
- Ahluwaja, A. (2018). Managing New Technology Risks - DNV GL Technology qualification process.
- Alexander, R., Hawkins, H. R. and Rae, A. J. (2015). Situation coverage—a coverage criterion for testing autonomous robots.
- Atzamos, G., Paterson, D., Vassalos, D. and Boulougouris, E. (2018). A new era of fishing vessel safety emerges. *Transport Research Arena (TRA)*. **2018**, doi:10.5281/zenodo.1486497
- Basnet, S., Bahootoroddy, A., Chaal, M., Valdez Banda, O. A., Lahtinen, J. and Kujala, P. (2022). A decision-making framework for selecting an MBSE language—A case study to ship pilotage. *Expert Systems with Applications*, **193**, 116451.
- Bolbot, V., Theotokatos, G., Bujorianu, L. M., Boulougouris, E. and Vassalos, D. (2019). Vulnerabilities and safety assurance methods in cyber-physical systems: A comprehensive review. *Reliability Engineering & System Safety*, **182**, 179–193.
- Bolbot, V., Theotokatos, G., Boulougouris, E., Wennersberg, L., Nordahl, H., Rødseth, ØJ, Faivre, J. and Colella, M. M. (2020). Paving the way toward autonomous shipping development for European Waters—The AUTOSHIP project.
- Bolbot, V., Theotokatos, G., Andreas Wennersberg, L., Faivre, J., Vassalos, D., Boulougouris, E., Jan Rødseth, Ø, Andersen, P., Pauwelyn, A.-S. and Van Coillie, A. (2021). A Novel Risk Assessment Process: Application to an Autonomous

- Inland Waterways Ship. *Proceedings of the Institution of Mechanical Engineers, Part O: Journal of Risk and Reliability*. doi:10.1177/1748006X211051829.
- Bureau Veritas.** (2019). Guidelines for autonomous shipping. In: Veritas, B. (ed.). *NI 641 DT R01E*, Paris: Bureau Veritas.
- Chaal, M., Valdez Banda, O. A., Glomsrud, J. A., Basnet, S., Hirdaris, S. and Kujala, P.** (2020). A framework to model the STPA hierarchical control structure of an autonomous ship. *Safety Science*, **132**, 104939.
- Chang, C.-H., Kontovas, C., Yu, Q. and Yang, Z.** (2021). Risk assessment of the operations of maritime autonomous surface ships. *Reliability Engineering & System Safety*, **207**, 107324.
- COLREGS** (1972). International Regulations for Preventing Collisions at Sea - Articles of the Convention on the International Regulations for Preventing Collisions at Sea.
- Daffey, K.** (2018). Technology Progression of Maritime Autonomous Surface Ships.
- Dalkey, N. and Helmer, O.** (1963). An experimental application of the Delphi method to the use of experts. *Management Science*, **9**, 458–467.
- De Vos, J., Hekkenberg, R. G. and Banda, O. A. V.** (2021). The impact of autonomous ships on safety at sea—a statistical analysis. *Reliability Engineering & System Safety*, **210**, 107558.
- Dogramadzi, S., Giannaccini, M. E., Harper, C., Sobhani, M., Woodman, R. and Choung, J.** (2014). Environmental hazard analysis—a variant of preliminary hazard analysis for autonomous mobile robots. *Journal of Intelligent & Robotic Systems*, **76**, 73–117.
- Du, L., Banda, O. A. V., Goerlandt, F., Huang, Y. and Kujala, P.** (2020). A COLREG-compliant ship collision alert system for stand-on vessels. *Ocean Engineering*, **218**, 107866.
- Duijm, N. J.** (2015). Recommendations on the use and design of risk matrices. *Safety Science*, **76**, 21–31.
- EMSA** (2020). Study on electrical energy storage for ships.
- Faivre, J. and Nzengu, W.** (2020). D2.3 Regulatory framework mapping & Identification of gaps and requirements for autonomous ships compliance.
- Fjortoft, K. and Rødseth, Ø.** (2020). Using the Operational Envelope to Make Autonomous Ships Safer. In *The 30th European Safety and Reliability Conference*, Venice, Italy.
- Gao, M. and Shi, G.-Y.** (2020). Ship collision avoidance anthropomorphic decision-making for structured learning based on AIS with Seq-CGAN. *Ocean Engineering*, **217**, 107922.
- Goerlandt, F., Goite, H., Valdez Banda, O. A., Höglund, A., Ahonen-Rainio, P. and Lensu, M.** (2017). An analysis of wintertime navigational accidents in the Northern Baltic Sea. *Safety Science*, **92**, 66–84.
- Guiochet, J.** (2016). Hazard analysis of human–robot interactions with HAZOP–UML. *Safety Science*, **84**, 225–237.
- Guiochet, J., Machin, M. and Waeselynck, H.** (2017). Safety-critical advanced robots: A survey. *Robotics and Autonomous Systems*, **94**, 43–52.
- Harper, C. and Caleb-Solly, P.** (2021). Towards an Ontological Framework for Environmental Survey Hazard Analysis of Autonomous Systems.
- Huang, Y., Chen, L., Chen, P., Negenborn, R. R. and Van Gelder, P.** (2020). Ship collision avoidance methods: State-of-the-art. *Safety Science*, **121**, 451–473.
- IMO.** (2018a). Revised guidelines for formal safety assessment (FSA) for use in the IMO rule-making process. London.
- IMO.** (2015). Revised guidelines for the onboard operational use of shipborne Automatic Identification Systems (AIS) Resolution A.1106(29).
- IMO.** (2018b). Revised guidelines for formal safety assessment (FSA) for use in the IMO rule-making process. London.
- IMO.** (2020). Regulatory scoping exercise [Online]. [Accessed].
- ISO.** (2009a). Risk management — Risk assessment techniques. International Organization for Standardization.
- ISO.** (2009b). *Risk Management — Risk Assessment Techniques. ISO 31010*. Geneva, Switzerland: International Organization for Standardization.
- ISO/IEC.** (2016). Information technology — Security techniques — Information security management systems (ISO/IEC 27000). British Standard Institution.
- Jinyu, L., Lei, L., Xiumin, C., Wei, H., Xinglong, L. and Cong, L.** (2021). Automatic identification system data-driven model for analysis of ship domain near bridge-waters. *Journal of Navigation*, **74**(6), 1284–1304. doi:10.1017/S0373463321000461
- Kaplan, S. and Garrick, B. J.** (1981). On the quantitative definition of risk. *Risk Analysis*, **1**, 11–27.
- Karahalios, H.** (2020). A risk assessment of ships groundings in rivers: The case of Parana river. *Journal of Navigation*, **73**, 833–845.
- Kulkarni, K., Goerlandt, F., Li, J., Banda, O. V. and Kujala, P.** (2020). Preventing shipping accidents: Past, present, and future of waterway risk management with Baltic Sea focus. *Safety Science*, **129**, 104798.
- Lee, H.-J., Furukawa, Y. and Park, D.-J.** (2021). Seafarers' awareness-based domain modelling in restricted areas. *Journal of Navigation*, **74**(5), 1172–1188. doi:10.1017/S0373463321000394
- Leveson, N. and Thomas, J.** (2018). STPA Handbook.
- Levine, E.** (2012). Improving risk matrices: The advantages of logarithmically scaled axes. *Journal of Risk Research*, **15**, 209–222.
- Luft, J. and Ingham, H.** (1961). The johari window. *Human Relations Training News*, **5**, 6–7.
- Mirror.** (2015) Available: <https://www.mirror.co.uk/news/weird-news/robot-vacuum-cleaner-attacks-woman-5131272> [Accessed].

- Mou, J. M., Van Der Tak, C. and Ligteringen, H.** (2010). Study on collision avoidance in busy waterways by using AIS data. *Ocean Engineering*, **37**, 483–490.
- Munin.** (2016). Maritime Unmanned Navigation through Intelligence in Networks [Online]. Available: <http://www.unmanned-ship.org/munin/> [Accessed 12/12/2019 2019].
- National Transportation Safety Board (NTSB)** (2017). *Collision Between a Car Operating With Automated Vehicle Control Systems and a Tractor-Semitrailer Truck Near Williston, Florida May 7, 2016 Highway Accident Report*. United States, Washington D.C.: National Transportation Safety Board.
- NHK.** (2019). Driverless trains under scrutiny after accident. Available: <https://www3.nhk.or.jp/nhkworld/en/news/backstories/569/> [Accessed 12/4/2022].
- Ni, S., Liu, Z., Huang, D., Cai, Y., Wang, X. and Gao, S.** (2021). An application-orientated anti-collision path planning algorithm for unmanned surface vehicles. *Ocean Engineering*, **235**, 109298.
- NYTIMES.** (2021). The New York Times (2021), 2 killed in driverless Tesla car crash, officials say. Available: <https://www.nytimes.com/2021/04/18/business/tesla-fatal-crashtexas.html> [Accessed 12/4/2022].
- Pedersen, P. T.** (2010). Review and application of ship collision and grounding analysis procedures. *Marine Structures*, **23**, 241–262.
- Pedersen, T. A., Glomsrud, J. A., Ruud, E.-L., Simonsen, A., Sandrib, J. and Eriksen, B.-O. H.** (2020). Towards simulation-based verification of autonomous navigation systems. *Safety Science*, **129**, 104799.
- Penmetsa, P., Sheinidashtegol, P., Musaev, A., Adanu, E. K. and Hudnall, M.** (2021). Effects of the autonomous vehicle crashes on public perception of the technology. *IATSS Research*, **45**, 485–492.
- Rawson, A. and Brito, M.** (2021). Developing contextually aware ship domains using machine learning. *Journal of Navigation*, **74**, 515–532.
- Rødseth, ØJ, Tjora, Å and Baltzersen, P.** (2015). D4.5 Architecture specification.
- Rødseth, ØJ, Faivre, J., Hjørungnes, S. R., Andersen, P., Bolbot, V., Pauwelyn, A.-S. and Wenersberg, L. A.** (2020). AUTOSHIP deliverable D3.1 Autonomous ship design standards, Revision 2.0.
- SAE.** (1996). ARP4761 - Guidance and methods for conducting the safety assessment process on civil airborn systems and equipment.
- Safety of Autonomous Systems Working Group (SASWG)** (2020). Safety assurance objectives for autonomous systems. Safety Critical Systems Society.
- Scharl, A., Stottlar, K. and Kady, R.** (2014). Functional Hazard Analysis (FHA) methodology tutorial. NAVSEA, warfare centers, Dahlgren.
- Sloan, M. C.** (2010). Aristotle's nicomachean ethics as the original locus for the septem circumstantiae. *Classical Philology*, **105**, 236–251.
- Smartmaritime.** (2020). ASKO to build two autonomous vessels for Oslo fjord operations [Online]. Available: <https://smartmaritimenetwork.com/2020/09/01/asko-to-build-two-autonomous-vessels-for-oslo-fjord-operations/> [Accessed 10/11/2020].
- TECHCRUNCH.** (2019). Drone crash near kids leads Swiss Post and Matternet to suspend autonomous deliveries. Available: [https://techcrunch.com/2019/07/30/drone-crash-near-kids-leads-swiss-post-andmatternet-to-suspend-autonomous-deliveries/?guccounter=1&guce\\_referrer=aHR0cHM6Ly93d3cuZ29vZ2x1LmNvbS88guce\\_referrer\\_sig=AQAAAM9KPHoVVRpcJSJ6xUSsiFPBGA4ukzO-73VX6E1agysKquOa\\_yLTDnmk\\_bpMjIMC9dzXmMNGxtz1gEqm6NFELRZTxxk\\_8AJLfwmekNsKikc1Cp2bH0q1jfgHs\\_x0pgTUa47Rf\\_lByO30tPtW2bzIAJh6OPswYYTqtOMoLGK2e](https://techcrunch.com/2019/07/30/drone-crash-near-kids-leads-swiss-post-andmatternet-to-suspend-autonomous-deliveries/?guccounter=1&guce_referrer=aHR0cHM6Ly93d3cuZ29vZ2x1LmNvbS88guce_referrer_sig=AQAAAM9KPHoVVRpcJSJ6xUSsiFPBGA4ukzO-73VX6E1agysKquOa_yLTDnmk_bpMjIMC9dzXmMNGxtz1gEqm6NFELRZTxxk_8AJLfwmekNsKikc1Cp2bH0q1jfgHs_x0pgTUa47Rf_lByO30tPtW2bzIAJh6OPswYYTqtOMoLGK2e) [Accessed on 12/4/2022]
- Thomas, J.** (2013). Extending and automating a systems-theoretic hazard analysis for requirements generation and analysis. Ph.D thesis, Massachusetts Institute of Technology.
- Torben, T. R., Glomsrud, J. A., Pedersen, T. A., Utne, I. B. and Sørensen, A. J.** (2022). Automatic Simulation-Based Testing of Autonomous Ships Using Gaussian Processes and Temporal Logic. *Proceedings of the Institution of Mechanical Engineers, Part O: Journal of Risk and Reliability*. doi:10.1177/1748006X211069277.
- Utne, I. B., Rokseth, B., Sørensen, A. J. and Vinnem, J. E.** (2020). Towards supervisory risk control of autonomous ships. *Reliability Engineering & System Safety*, **196**, 106757.
- Valdez Banda, O. A., Kannos, S., Goerlandt, F., Van Gelder, P. H. A. J. M., Bergström, M. and Kujala, P.** (2019). A systemic hazard analysis and management process for the concept design phase of an autonomous vessel. *Reliability Engineering & System Safety*, **191**, 106584.
- Ventikos, N. P., Chmurski, A. and Louzis, K.** (2020). A systems-based application for autonomous vessels safety: Hazard identification as a function of increasing autonomy levels. *Safety Science*, **131**, 104919.
- Wang, P.** (2017). Chapter 7 - failure modes and effects analysis with summary. In: Bolger, C. (ed.). *Civil Aircraft Electrical Power System Safety Assessment*, Chennai, India: Butterworth-Heinemann, 187–216.
- Wang, H., Liu, Z., Wang, X., Graham, T. and Wang, J.** (2021). An analysis of factors affecting the severity of marine accidents. *Reliability Engineering & System Safety*, **210**, 107513. ISSN 0951-8320. doi:10.1016/j.res.2021.107513.
- Wenersberg, L. A. and Nordahl, H.** (2019). D2.1 - Complete supply chain mapping & identifications of interactions between SSS and IWW demonstrators.
- Woerner, K., Benjamin, M. R., Novitzky, M. and Leonard, J. J.** (2019). Quantifying protocol evaluation for autonomous collision avoidance. *Autonomous Robots*, **43**, 967–991.

- Wróbel, K., Montewka, J. and Kujala, P.** (2018). Towards the development of a system-theoretic model for safety assessment of autonomous merchant vessels. *Reliability Engineering & System Safety*, **178**, 209–224.
- Yang, X., Utne, I. B., Sandøy, S. S., Ramos, M. A. and Rokseth, B.** (2020). A systems-theoretic approach to hazard identification of marine systems with dynamic autonomy. *Ocean Engineering*, **217**, 107930.
- Yara.** (2018). Yara Birkeland press kit [Online]. Available: <https://www.yara.com/news-and-media/press-kits/yara-birkeland-press-kit/> [Accessed 2019/12/12].
- Zhang, W., Feng, X., Qi, Y., Shu, F., Zhang, Y. and Wang, Y.** (2019). Towards a model of regional vessel near-miss collision risk assessment for open waters based on AIS data. *Journal of Navigation*, **72**, 1449–1468.
- Zhou, X.-Y., Huang, J.-J., Wang, F.-W., Wu, Z.-L. and Liu, Z.-J.** (2020). A study of the application barriers to the use of autonomous ships posed by the good seamanship requirement of COLREGs. *Journal of Navigation*, **73**, 710–725.